

TANK VENT CHECK VALVE

AERO 1.1


Typical application: For venting of ballast- & fuel/lubeoiltanks.
Intended for mounting on open deck
Type approved by major class societies

Options:

- Theaded or butt weld ends
- Stainless steel version
- Heating element available
- Flame screen available



PART	MATERIAL
Body	Steel ST37 Galvanized
Seal	Neoprene
Float	PE
Guiding Pin	AISI 316

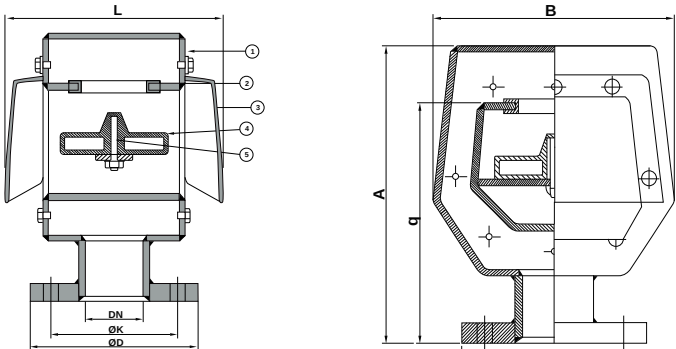

DN	ART. NR. STANDARD	L mm	B mm	A mm	A mm	ØK mm	ØD mm	WEIGHT kg	FLANGE DRILLING
40		223	213	263	222	110	150	13,0	PN 16
50	8391328	223	213	263	222	125	165	14,0	PN 16
65	8391331	223	213	263	222	145	180	15,0	PN 16
80	8391333	257	270	310	255	160	200	20,0	PN 16
100	8391335	257	270	310	255	180	220	21,0	PN 16
125	8391337	304	302	355	280	210	250	28,0	PN 16
150	8391339	366	385	448	356	240	285	41,0	PN 16
175		411	430	477	392	270	315	53,0	PN 16
200	8391344	461	470	517	425	295	340	63,0	PN 10
250	8391346	536	590	660	530	350	395	97,0	PN 10
300	8391348	681	685	731	585	400	445	121,0	PN 10
350		766	885	887	700	460	505	175	PN 10
400		766	885	887	700	515	565	205	PN 10