
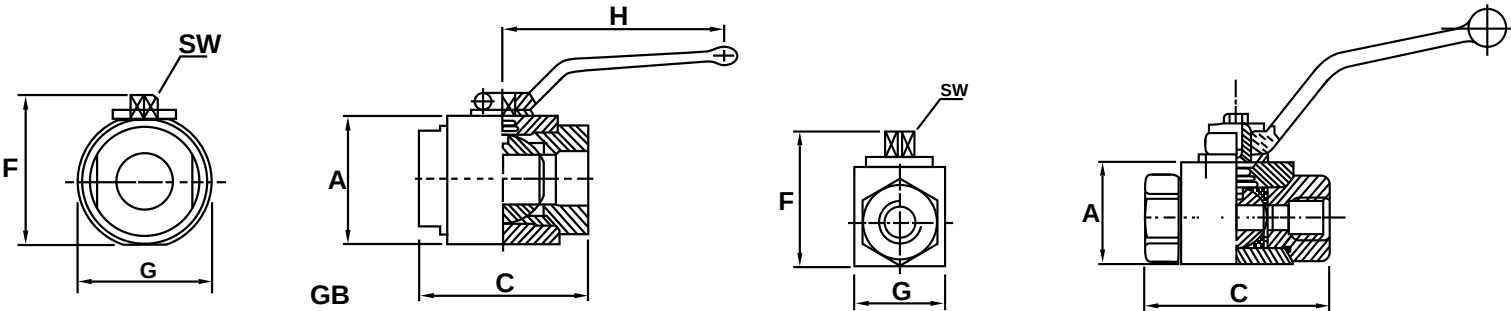


2 – WAY BALL VALVE HIGH PRESSURE FEMALE BSP DIN

Delivered with BSP or NTP threads.

Pressure rating:

- 1/4' – 1/2' : PN 500
- 3/4' – : PN 400
- 1' – 2' : PN 350

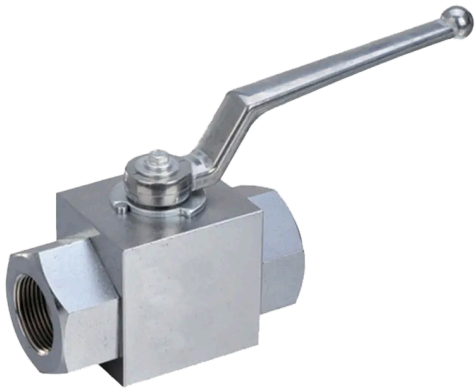

TYPE	THREAD G	PN BAR	ART. NR. Steel	ART. NR. AISI316	DIM	A	C	F	G	H	SW	WEIGHT kg
GE MINI	1/4	500			6	25	63	32	25	57	6	0,40
GE	1/8	500		35312010	4	35	71	49	30	110	9	0,50
GE	1/4	500	35302012	1786562	6	35	71	49	30	110	9	0,50
GE	3/8	500	35302014	1786563	10	40	73	54	35	110	9	0,65
GE	1/2	500	35302016	1786564	13	43	83	57	37	110	9	0,75
GE	3/4	400	35302018	1786565	20	55	95	73	45	180	14	1,4
GE	1	350	35302020	1786566	25	65	113	83	55	180	14	2,2
GE	1.1/4	350	35302022	35312022	25	65	121	83	55	180	14	2,25
GE	1.1/2	350	35302024	35312024	25	65	124	83	55	180	14	2,35
GB	1.1/4	350		35312026	32	82,5	115	101	88	300	14	2,70
GB	1.1/2	350		35312028	40	98	131	115	102	300	14	3,20
GB	2	350		35312032	40	98	131	115	102	300	14	3,90
GB	2	350			50	103	140	120	109	300	14	4,30