


3-PIECE FULL BORE BALL VALVE – PN 64

Typical application: Marine & industry for oil, water +++

ISO top flange for direct actuator-mounting without bracket.

Available both as threaded BSP version and with BW weld ends.



Max working pressure



1/2" – 1 1/2": 63 bar

2": 40 bar

NR	PART NAME	MATERIAL
1 & 2	Body	1.4408 / CF8M
3	Seat	PTFE
4	Ball	AISI 316
5	Shaft	AISI 316

NR	PART NAME	MATERIAL
6	Gasket	PTFE
7	Washer	PTFE
8	O-ring	Viton
9	Nut	SS 304

NR	PART NAME	MATERIAL
10	Gasket	PTFE
11	Washer	SS 301
12	Snap ring	SS 304
13	Lever	SS 304
15-19	Bolts, nuts & Washers	SS 304

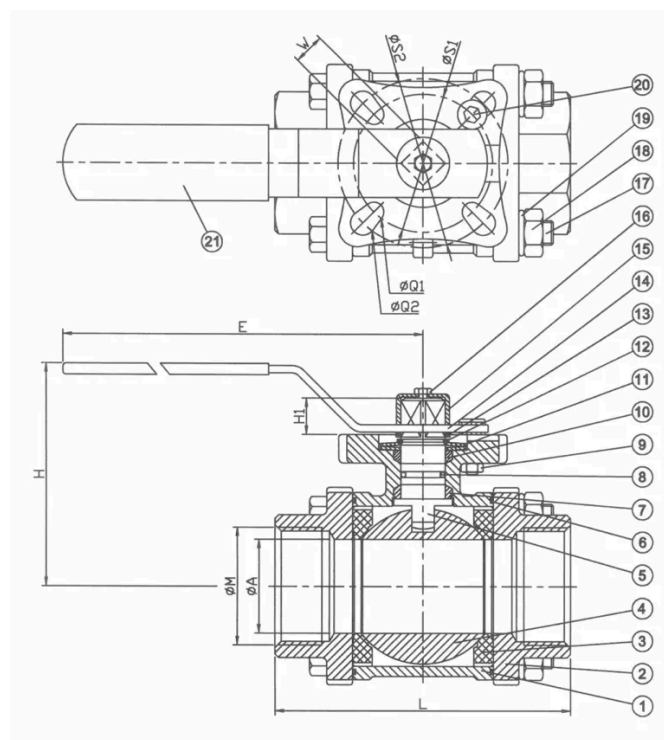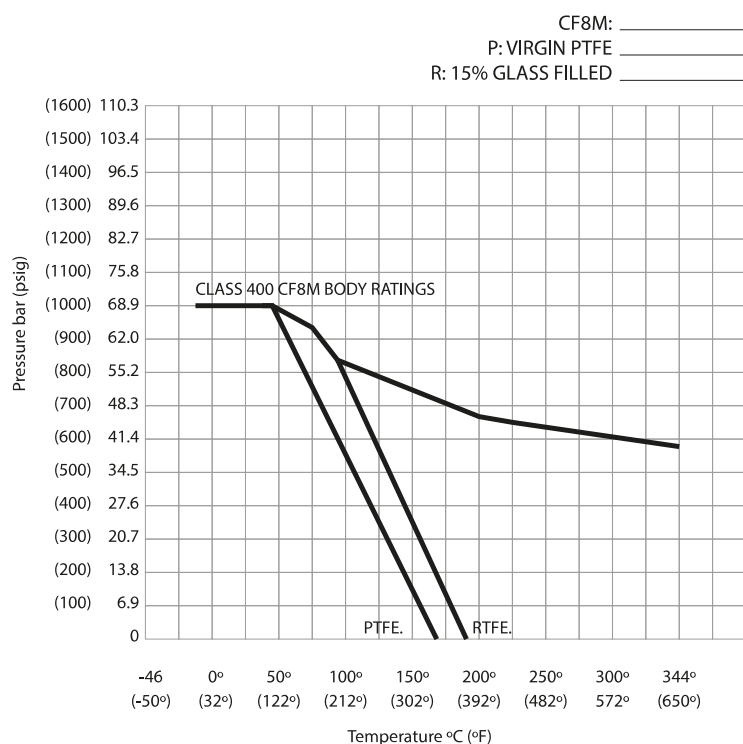

DIM/SIZE	DN	ART. NR.	ØA mm	E mm	W mm	H1 mm	H mm	S1	S2	L mm	MAX WORK PRESS. TEMP UP TO 120 °C
1/4"	8	080031	11,5	135	9,0	10,0	58	42	50	70	
3/8"	12	080032	12,6	135	9,0	10,0	61	42	50	70	
1/2"	15	080033	15,0	135	9,0	10,0	66	42	50	75	
3/4"	20	080034	20,0	135	9,0	10,0	73	42	50	80	
1"	25	080035	25,0	170	11,0	12,0	88	50	70	90	
1 1/4"	32	080036	32,0	170	11,0	12,0	93,5	50	70	110	
1 1/2"	40	080037	38,0	215	14,0	16,0	109,5	70	102	120	
2"	50	080038	50,8	215	14,0	16,0	118,5	70	102	140	