




BALL VALVE – PN 16/40

Full bore. ISO 5211 top flange

Flange drilling: PN 16

Alternatives:

Material CS A216 & Ductile iron

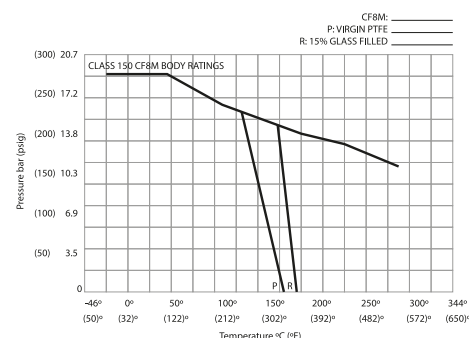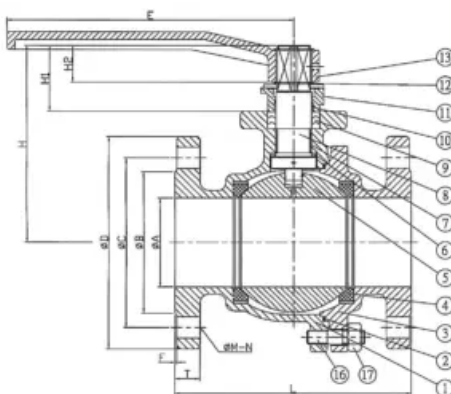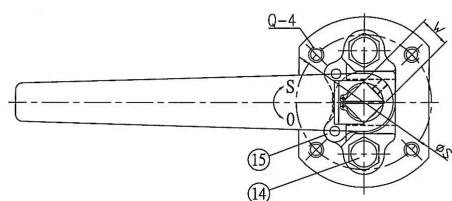

NR/NO	PART	MATERIAL
1	Body	Stainless Steel SS 1.4408
2	Body seal	PTFE
3	End cap	Stainless Steel SS 1.4408
4	Seat	RTFE
5	Ball	AISI 316
6	Washer	PTFE
7	Bushing	PTFE
8	Stem	AISI 316
9	Stem packing	PTFE
10	Gland bearing	PTFE
11	Gland	AISI 304
12	Snap ring	AISI 304
13	Spak	Steel
14	Bolt	AISI 304
15	Stop plate	AISI 304
16	Bolt	SS A193 Gr. B8
17	Mutter	SS A194 Gr. 8

DN	ART. NR. MANUAL	ØA mm	L mm	ØD mm	H mm	H1 mm	W mm	E mm	ØS mm	PRESSURE RATING
15	080133	15	115,0	95,0	65,7	22,7	11,0	131,0	42,0	PN 16
20	080134	20	120,0	105,0	68,2	22,5	11,0	131,0	42,0	PN 16
25	080135	25	125,0	115,0	80,6	29,3	14,0	165,0	50,0	PN 16
32	080136	32	130,0	140,0	86,5	29,3	14,0	165,0	50,0	PN 16
40	080137	40	140,0	150,0	108,9	38,4	17,0	200,0	70,0	PN 16
50	080138	50	150,0	165,0	116,5	38,4	17,0	200,0	70,0	PN 16
65	080139	65	170,0	185,0	139,0	38,4	17,0	200,0	70,0	PN 16
80	080140	80	180,0	200,0	169,4	58,3	22,0	330,0	102,0	PN 16
100	080141	100	190,0	220,0	193,3	60,3	22,0	330,0	102,0	PN 16
125	080142	125	325,0	250,0	237,0	75,0	27,0	753,0	125,0	PN 16
150	080143	150	350,0	285,0	256,0	75,00	27,00	753,00	125,0	PN 16