

BLIND FLANGE VALVE

RVA BFV 1: SS/SS PN 10/16

RVA BFV 2: SS/SS PN 20/25

RVA BFV 3: CS/SS PN 10/16

RVA BFV 4: CS/SS PN 20/25

Secure blinding and segregation of different systems and cargoes.

Certified by most classification societies




Options:

ANSI & JIS flange drilling

Available with indicator

PART NO.	PART	MATERIAL CS VERSION	MATERIAL SS VERSION
1	Body	CS A216 WCB	SS A351 Gr. CF8M
2	Disc	AISI 304	SS A351 Gr. CF8M
3	Tightening nut	AISI 304	SS A351 Gr. CF8M
4	Disc seal	PTFE	PTFE
5	Stop pin	AISI 304	AISI 316
6	Top cover seal	Kemflon + PTFE	Kemflon + PTFE
7	Top cover bolts	AISI 304	AISI 316
8	Spring	Stainless Steel	Stainless Steel
9	Top cover	CS A216 WCB	SS A351 Gr. CF8M
10	Washer	AISI 304	AISI 316
11	Top cover nut	AISI 304	AISI 316
12	Drain seal	PTFE	PTFE
13	Drain plug	AISI 304	AISI 316
14	O-ring (12-12")	Viton	Viton
15	Metal ring (10-12")	AISI 304	AISI 316

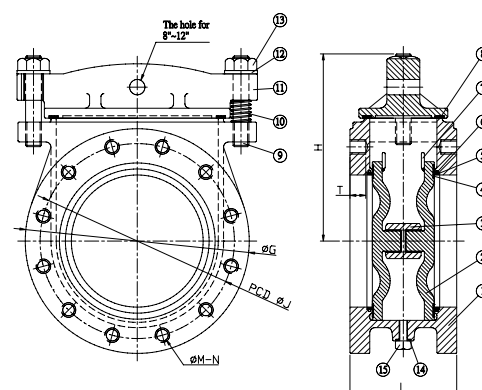

RVA BFV 1 : SS/SS - PN 10 / 16

DN	ART.NR.	FLANGE DRILLING	WORK PRESS.	ØJ mm	ØG mm	L mm	H mm	WEIGHT kg	ØM x N
50	120068	PN 16	16 bar	125	165	154	173	21	M16 x 4
65	120069	PN 16	16 bar	145	185	154	185	23	M16 x 4
80	120070	PN 16	16 bar	160	200	154	194	30	M16 x 8
100	120071	PN 16	16 bar	180	220	162	235	34	M16 x 8
125	120072	PN 16	16 bar	210	250	162	245	43	M16 x 8
150	120073	PN 16	16 bar	240	285	162	265	50	M20 x 8
200	120074	PN 10	10 bar	295	340	162	300	68	M20 x 8
250	120075	PN 10	10 bar	350	395	200	330	90	M20 x 12
300	120076	PN 10	10 bar	400	445	200	360	115	M20 x 12

RVA BFV 2 : SS/SS - PN 20 / 25

DN	ART.NR.	FLANGE DRILLING	WORK PRESS.	ØJ mm	ØG mm	L mm	H mm	WEIGHT kg	ØM x N
50		PN 40	25 bar	125	165	154	173	21	M16 x 4
65		PN 40	25 bar	145	185	154	185	23	M16 x 8
80		PN 40	25 bar	160	200	154	194	30	M16 x 8
100		PN 40	25 bar	180	220	162	235	34	M20 x 8
125		PN 40	25 bar	210	250	162	245	43	M24 x 8
150	120103	PN 40	25 bar	240	285	162	265	50	M24 x 8
200		PN 25	20 bar	295	340	162	300	68	M24 x 12
250		PN 25	20 bar	350	395	200	330	90	M27 x 12
300		PN 25	20 bar	400	445	200	360	115	M27 x 16

RVA BFV 3 : CS/SS - PN 10 / 16

DN	ART.NR.	FLANGE DRILLING	WORK PRESS.	ØJ mm	ØG mm	L mm	H mm	WEIGHT kg	ØM X N
50	120008	PN 16	16 bar	125	165	154	173	21	M16 x 4
65	120009	PN 16	16 bar	145	185	154	185	23	M16 x 4
80	120010	PN 16	16 bar	160	200	154	194	30	M16 x 8
100	120011	PN 16	16 bar	180	220	162	235	34	M16 x 8
125	120012	PN 16	16 bar	210	250	162	245	43	M16 x 8
150	120013	PN 16	16 bar	240	285	162	265	50	M20 x 8
200	120014	PN 10	10 bar	295	340	162	300	68	M20 x 8
250	120015	PN 10	10 bar	350	395	200	330	90	M20 x 12
300	120016	PN 10	10 bar	400	445	200	360	115	M20 x 12

RVA BFV 4 : CS/SS - PN 20 / 25

DN	ART.NR.	FLANGE DRILLING	WORK PRESS.	ØJ mm	ØG mm	L mm	H mm	WEIGHT kg	ØM X N
50	120038	PN 40	25 bar	125	165	154	173	21	M16 x 4
65	120039	PN 40	25 bar	145	185	154	185	23	M16 x 8
80	120040	PN 40	25 bar	160	200	154	194	30	M16 x 8
100	120041	PN 40	25 bar	180	220	162	235	34	M20 x 8
125	120042	PN 40	25 bar	210	250	162	245	43	M24 x 8
150	120043	PN 40	25 bar	240	285	162	265	50	M24 x 8
200	120044	PN 25	20 bar	295	340	162	300	68	M24 x 12
250	120045	PN 25	20 bar	350	395	200	330	90	M27 x 12
300	120046	PN 25	20 bar	400	445	200	360	115	M27 x 16