

CHECKVALVE STRAIGHT, PN 16

Typical application: Marine & industry for oil, water, seawater +++


Max temperature: 180 °C

Options:

ANSI & JIS flange drilling



PART	MATERIAL
Hus & Kjegle	Seigjern GGG 40.3
Disc	Ductile Iron GGG 40.3
Seat	CuSn5Zn5Pb5-C (Rg5)
Spring	1.4310 spring steel
Gasket	Graphite

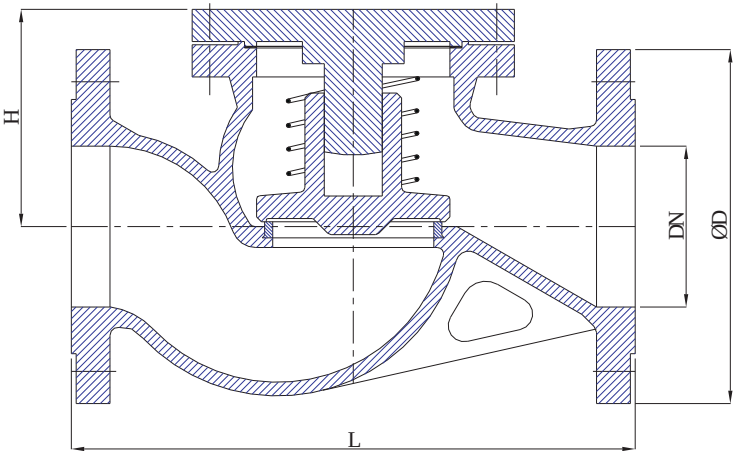

DN	ART. NR.	ØD mm	L mm	H mm	ØR mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 120°C	MAX WORK PRESS. TEMP 120 – 180°C
15		95	130	55		3,0	16 BAR	10 BAR
20		105	150	55		3,5	16 BAR	10 BAR
25		115	160	65		4,0	16 BAR	10 BAR
32		140	180	75		5,0	16 BAR	10 BAR
40		150	200	80		8,0	16 BAR	10 BAR
50		165	230	85		10,0	16 BAR	10 BAR
65		185	290	95		14,0	16 BAR	10 BAR
80		200	310	115		22,0	16 BAR	10 BAR
100		220	350	140		38,0	16 BAR	10 BAR
125		250	400	160		47,0	16 BAR	10 BAR
150		285	480	200		60,0	16 BAR	10 BAR
200		340	600	245		95,0	16 BAR	10 BAR
250		395	730	290		115,0	10 BAR	6 BAR
300		445	850	345		150,0	6 BAR	4 BAR
350		505	980	400		230,0	6 BAR	4 BAR
400		300	425	425		280,0	4 BAR	2 BAR