

DIAPHRAGM VALVE

PN10/16

Vacuum systems, air and water.
Suitable for regulation purposes.


Max. temp:
80° C

Pressure class:
3/8" – 2" : 16 bar.

Options:
Available with diaphragm in alternative materials.



NR	PART NAME	MATERIAL
1	Body	Cast Iron GG25
2	Bonnet	Cast Iron GG25
3	Stem	Cast Steel GSC25
4	Disc	Cast Iron GG25
5	Diaphr.	NBR
6	Handweel	Cast Iron GG25

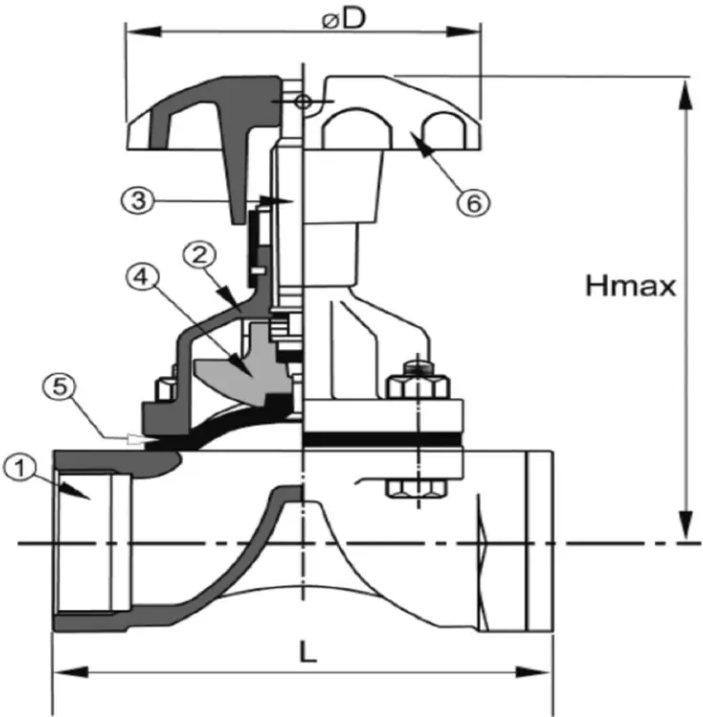

DN	ART. NR.	G	L mm	H MAX mm	D mm	WEIGHT kg
15		1/2"	64	90	82	1,3
20		3/4"	83	94	82	1,5
25		1"	111	119	120	2,2
32		1 1/4"	124	155	120	3,1
40		1 1/2"	143	164	120	3,9
50		2"	168	188	120	4,6