

DIAPHRAGM VALVE


Typical application: Used for air, water and various chemicals.

Temp. range: -20°C – +200°C

Wp range: Dn15-80 pn 10, DN100-150 PN 6, DN200-300 PN 4



NR/NO	PART	MATERIAL
1	Body	Cast iron 6625
2	Diaphragm	EPDM/NBR/VITON
3	Cone	Cast iron 6625
4	Nut	Bronze
5	Bonnet	Cast iron 6625
6	Handwheel	Cast iron 6625

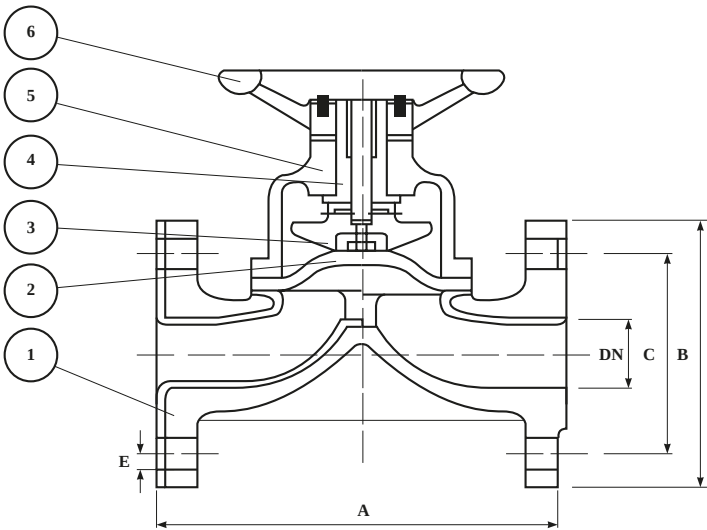

DN	ART. NR.	A mm	B mm	C mm	N* mm	WEIGHT kg
15		130	95	65	4	2
20		150	105	75	4	3
25		160	115	85	4	4
32		180	140	100	4	6
40		200	150	110	4	8
50		230	165	125	4	12
65		295	185	145	4	22
80		310	200	160	4	24
100		350	220	180	8	36
125		400	250	210	8	51
150		480	285	240	8	78
200		600	340	295	8	158
250		730	395	350	12	200
300		850	445	400	12	296

*Number of holes