

DOUBLE ECCENTRIC BUTTERFLY VALVE

WAFER & LUG TYPE PN 16/40


Options:

«Fire safe» to API 607 / BS 76755 Part 2

Can be equipped with heating cover



PART/MATERIAL	SS / SS / PTFE	CS / SS / PTFE	CS / CS / PTFE	BRONZE/PTFE
Body	Stainless Steel CF8M	Cast steel ASTM A216	Cast steel ASTM A216	Bronze B-148
Disc	Stainless Steel CF8M	Stainless Steel CF8M	Cast steel ASTM A216	Bronze B-148
Seat	Reinforced RTFE	Reinforced RTFE	Reinforced RTFE	Reinforced RTFE
Shaft	17.4 Ph / A564	17.4 Ph / A564		Monel

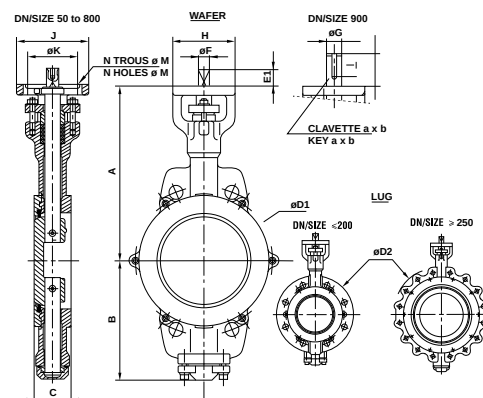

DN	A mm	B mm	C mm	ØD1 mm	ØD2 mm	E1 mm	ØF mm	E2 mm	ØG mm	H mm	J mm	K mm	ØM mm	N mm	A mm	B mm	L mm	WEIGHT WAFER	WEIGHT LUG
50	175	102	43	97	153	25,5	11	—	14*	70	80	70	9	4	—	—	—	3,1	4,8
65	191	116	46	117	173	25,5	11	—	14*	70	80	70	9	4	—	—	—	4,5	6,9
80	197	122	46	130	190	25,5	11	—	14*	70	80	70	9	4	—	—	—	4,9	7,7
100	233	149	52	158	225	25,5	14	—	18*	100	100	102	11	4	—	—	—	8,2	13,7
125	245	160	56	188	261	25,5	14	—	18*	100	100	102	11	4	—	—	—	9,8	17
150	283	193	56	212	294	25,5	19	—	25*	100	116	102	11	4	—	—	—	12,5	22,5
200	307	217	60	267	365	25,5	19	—	25*	100	116	102	11	4	—	—	—	21,9	33,7
250	371	251	68	321	420	36	27	70*	35*	132	155	125	14	4	10*	8*	65*	40,4	52,5
300	399	302	78	372	476	36	27	70*	35*	132	155	125	14	4	10*	8*	65*	54,6	77,5
350	421	324	78	431	542	36	27	70*	35*	132	155	125	14	4	10*	8*	65*	74,4	96,5
400	453	358	102	484	606	43	32	90,5*	40*	140	162	140	18	4	12*	8*	73*	97,6	133
450	522	392	114	534	662	49	36	100*	50*	—	Ø175	140	18	4	14*	9*	60*	145	206
500	550	427	127	590	722	63	46	100*	60*	—	Ø210	165	22	4	18*	11*	80*	188	244
600	634	485	154	689	837	63	46	100*	60*	—	Ø210	165	22	4	18*	11*	80*	224	306
700	720	547	165	799	947	—	—	110*	80	—	Ø300	254	18	8	22	14	100	269	450
800	771	598	190	—	1070	—	—	110*	80	—	Ø300	254	18	8	22	14	100	—	825
900	878	687	241	1000	—	—	—	110	100	—	Ø350	254	18	8	28	16	100	850	—

EN 10204 – 3.1 certificate available. *Free top