

ELECTRICAL ACTUATOR

TYPE EL – TORQUE QT 250, QT 800 AND QT 2500

EL Torque QT 250, QT 800 and QT 2500 are electric valve actuators for control of “quarter – turn” valves as, 2 – ways and 3 – ways ball valves, and butterfly valves. The actuator is small and compact in its form, and provides high torque at low RPM.

The actuator can withstand aggressive environments and be used within most industrial applications.


By use of only three sizes of actuators, you cover valves with torque up to 2500 Nm.

This is a full Norwegian patented product.

Technical information:

- Power supply 230V – AC 50/60 Hz (for QT 2500: 110-240V AC)
- Protection class IP 68
- Three different types of interface (see next page)
- Programming of rotation speed, torque and position is possible
- Explosion proof acc. to “ex TP4 Zone 1”
- Approved to be used on “open deck”
- Maintenance free
- Type approval by DNV
- 100% feedback

QT 250

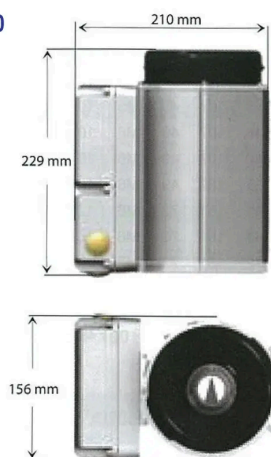


Black

-25 – 55⁰ C

Not for use on open deck.

QT 800

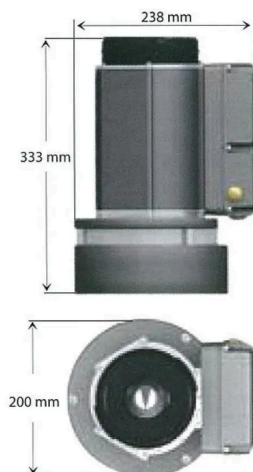

Silver

-25 – 70⁰ C

Approved for use on open deck.

QT 2500

