

FIRE VALVE FOR GROOVED COUPLING – ANGLE


Valve for mounting with Grinnell/Victaulic couplings for grooved ends

Screwed bonnet, double sealing.

Available with Storz coupling and cap.



NR	PART NAME	MATERIAL
1	Body	CuAl10Fe5Ni5-C (AlBr)
2	Bonnet	CuAl10Fe5Ni5-C (AlBr)
3	Disc	CuAl10Fe5Ni5-C (AlBr)
4	Stem	CuAl10Ni3Fe2-C
5	Disc sealing ring	NBR
6	Handwheel	EN-GJL250 (GG25)

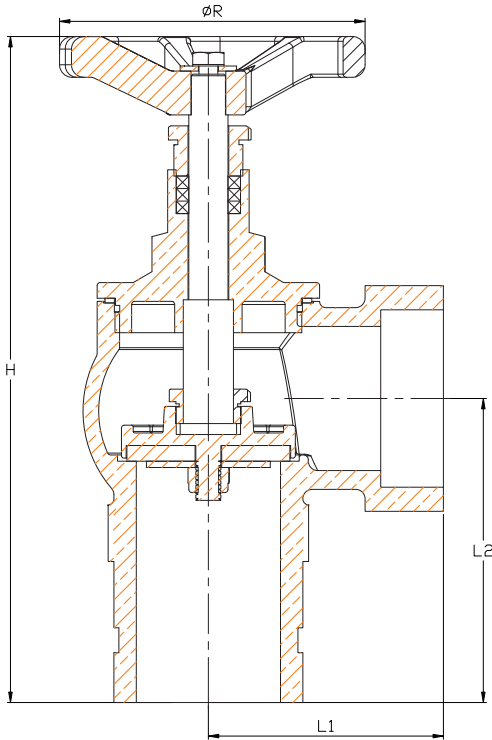

DN	ART. NR.	FLANGE	H (OPEN) mm	H (CLOSED) mm	L1 mm	L2 mm	R mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 80°C
50	120270	PN 16	232	213	75	98	100	4,0	16 BAR

EN 10204 – 3.1 certificate available