


FIRE VALVE – STRAIGHT RG.5

Flanged version, drilled PN 16
Bolted bonnet and double sealing
Complete with Storz coupling and cap


Max temperature: 80°C

Options:

ANSI & JIS flange drilling



PART NAME	MATERIAL
Body	G-CuSn5ZnPb
Disc	CuZn39Pb3
Stem	CuZn39Pb3
Seatv ring	NBR
Coupling	CuZn39Pb3

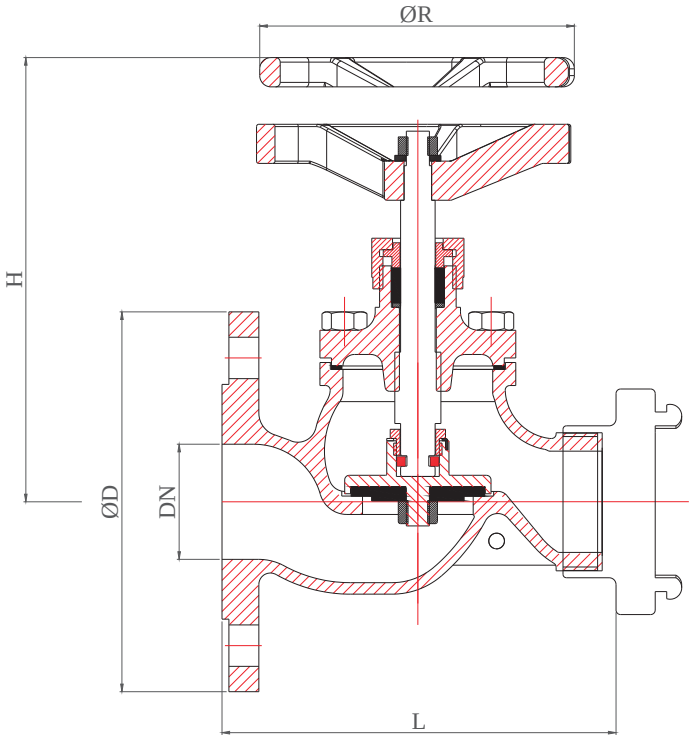

DN	ART. NR.	FLANGE	ØD mm	H1 (OPEN) mm	L mm	ØR mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 80°C
40		PN 16	150	180	168	140	7,0	16 BAR
50	120268	PN 16	165	180	172	140	9,0	16 BAR
65	120269	PN 16	185	205	210	160	11,0	16 BAR

EN 10204 – 3.1 certificate available