



FULLBORE BALL VALVE

CIM 11 CR - PN16

Ball valve in dezincification free brass for usage on non-aggressive mediums.



PART NAME	MATERIAL
HBody	Brass CR EN12164 CW 602N
Ball	Brass CR EN12164 CW 602N
Ball seat	P.T.F.E(Teflon)
Stem	O – rings in FKM
Gland nut	Brass CR EN12164 CW 602N
Stem	Brass CR EN12164 CW 602N
Lever	Steel with PVC
Lock nut	Steel

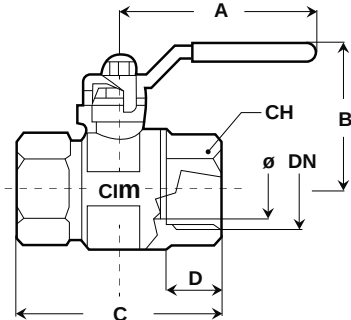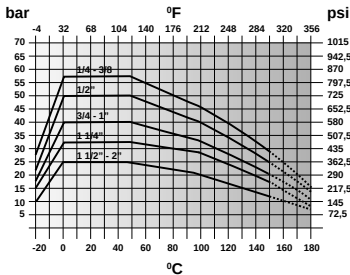

DIM	ART. NR.	Ø mm	A mm	B mm	C mm	D mm	CH mm	TORQUE		WEIGHT kg
								MAX	OPERAT	
1/4"	5665002	10	65	34	45	11,6	18	2	1	0,12
3/8"	5665003	10	65	34	47	12,5	20	2	1	0,12
1/2"	5665004	15	80	46	61	17	25	6	3	0,22
3/4"	5665005	20	100	53	68	18,5	31	10	5	0,36
1"	5665006	25	100	54	82	21	40	12	6	0,59
1 1/4"	5665007	32	120	66	92	22,5	49	14	7	0,92
1 1/2"	5665008	40	150	81	107	23	55	20	10	1,40
2"	5665009	50	150	88	125	26,5	69	26	13	2,10