


GLOBE VALVE ANGLE – PN 16

Typical application: Marine & industry for oil, water, seawater +++


Max. temperature: 180°C

Options:

- Non return version (SDNR) with spring
- Regulating cone
- ANSI & JIS flange drilling

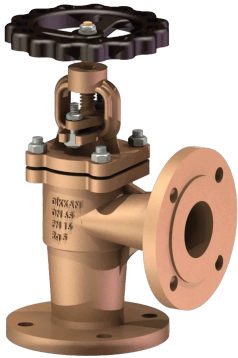

PART	MATERIAL
Body	Bronze CuSn5Zn5Pb5-C (Rg5)
Disc	CuSn5Zn5Pb5-C (Rg5)
Stem	CuZn35Ni (Som59)
Gasket	Graphite

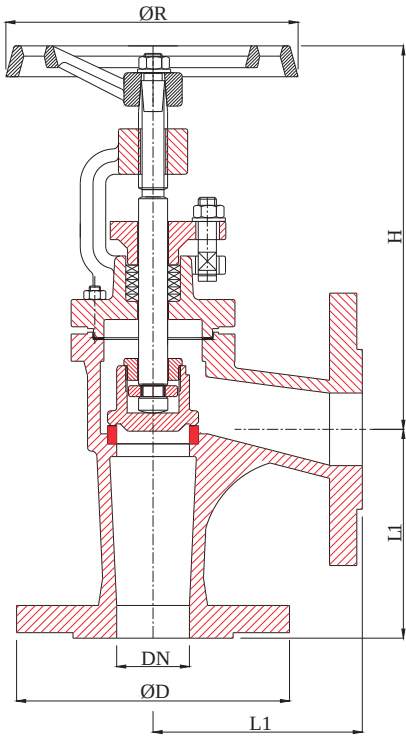

DN	ART. NR. FAST/FIXED	ART. NR. SDNR	ØD mm	L1 mm	H mm	ØR mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 120°C	MAX WORK PRESS. TEMP 120°C – 180°C
15			95	90	160	120	3,8	16 BAR	10 BAR
20			105	95	155	120	4,0	16 BAR	10 BAR
25			115	100	165	140	5,0	16 BAR	10 BAR
32			140	105	170	140	7,0	16 BAR	10 BAR
40			150	115	215	160	10,0	16 BAR	10 BAR
50			165	125	215	160	12,0	16 BAR	10 BAR
65			185	145	225	180	17,0	16 BAR	10 BAR
80			200	155	265	200	23,0	16 BAR	10 BAR
100			220	175	305	225	33,0	16 BAR	10 BAR
125			250	200	310	250	50,0	16 BAR	10 BAR
150			285	225	355	300	70,0	16 BAR	10 BAR

EN 10204 – 3.1 certificate available. *Free topp