

GLOBE VALVE ANGLE – PN 40

Typical application: Marine & industry for hydraulics, steam, air +++
Can be DNV certified for overboard.


Max temperature: 180°C

Options:

- Non return version (SDNR) with spring
- Regulating cone
- ANSI & JIS flange drilling



PART	MATERIAL
Body	Cast steel GS C25 N
Seat	AISI 304 (1.4301)
Disc (<65)	X20Cr13 (1.4021)
Disc (>65)	Støpestål/CS (GS C25 N)
Stem	X20Cr13 (1.4021)
Gasket	Graphite

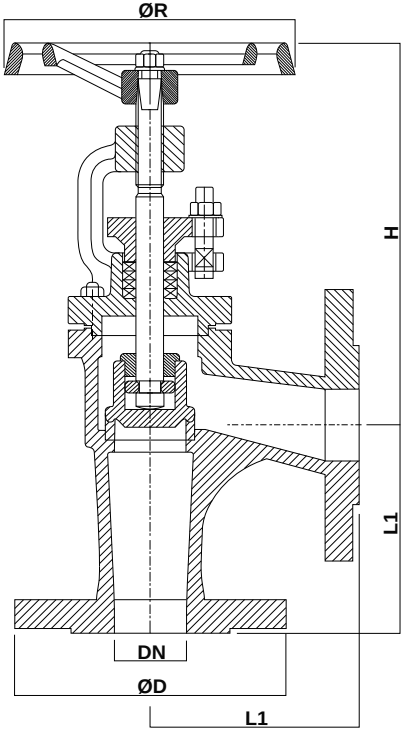

DN	ART. NR. FAST/FIXED	ART. NR. SDNR	ØD mm	L1 mm	H mm	ØR mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 120°C
15	–	–	95	90	160	120	3,8	40 BAR
20	–	–	105	95	155	120	4,0	40 BAR
25	–	–	115	100	165	140	5,0	40 BAR
32	–	–	140	105	170	140	7,0	40 BAR
40	–	–	150	115	215	160	10,0	40 BAR
50	–	–	165	125	215	160	12,0	40 BAR
65	–	–	185	145	225	180	17,0	40 BAR
80	–	–	200	155	265	200	23,0	40 BAR
100	–	–	235	175	305	225	33,0	40 BAR
125	–	–	270	200	310	250	50,0	40 BAR
150	–	–	300	225	355	300	70,0	40 BAR

EN 10204 – 3.1 certificate available. *Free top