

GLOBE VALVE BRONZE – ANGLE

Metal seted globe valve with secured bonnet. Angle flow with BSP threads.

Alternative


Available as non return valve w/spring and with disc for regulation

Pressure/temp. range

16 bar 120°C / 12 bar 200°C



PART NAME	MATERIAL
Body	Bronze Rg5 G-cuSn5ZnPb5-C
Bonnet	Bronze Rg5 G-cuSn5ZnPb5-C
Disc	Bronze Rg5 G-cuSn5ZnPb5-C
Stem	Special brass CuZn35Ni (Som 59)
Bonnet gasket	PTFE
Gland packing	Graphite
Handwheel	Cast iron

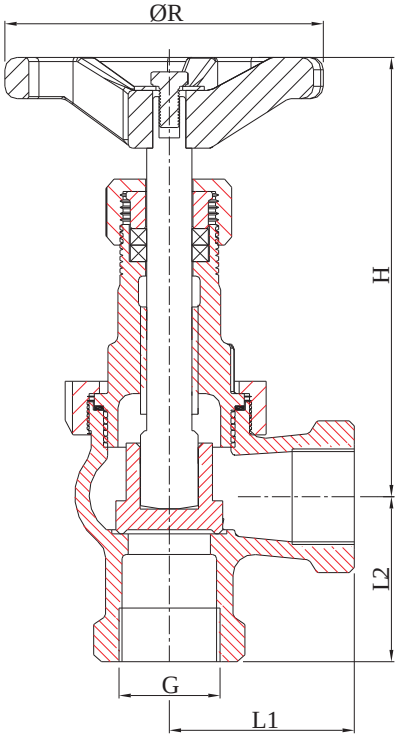

DIM/SIZE G	DN	ART. NR. STOP	ART. NR. SDNR	ART. NR. REGULATING	L 1 mm	L 2 mm	H mm	ØR mm	WEIGHT kg
3/8"	10				35	30	93	63	0,60
1/2"	15				40	35	94	63	0,60
3/4"	20				45	40	106	80	0,90
1"	25				50	45	115	80	1,20
1 1/4"	32				55	50	125	90	1,90
1 1/2"	40				65	55	135	100	2,50
2"	50				75	65	150	125	4,00
2 1/2"	65				90	75	230	160	5,50
3"	80				110	90	250	200	7,50