

GLOBE VALVE BRONZE

Metal seted globe valve with secured bonnet.Straight flow with BSP threads.

Alternative


Available as non return valve w/spring and with disc for regulation

Pressure/temp. range

16 bar 120°C / 12 bar 200°C



PART NAME	MATERIAL
Body	Bronze Rg5 G-cuSn5ZnPb5-C
Bonnet	Bronze Rg5 G-cuSn5ZnPb5-C
Disc	Bronze Rg5 G-cuSn5ZnPb5-C
Stem	Special brass CuZn35Ni (Som 59)
Bonnet gasket	PTFE
Gland packing	Graphite
Handwheel	Cast iron

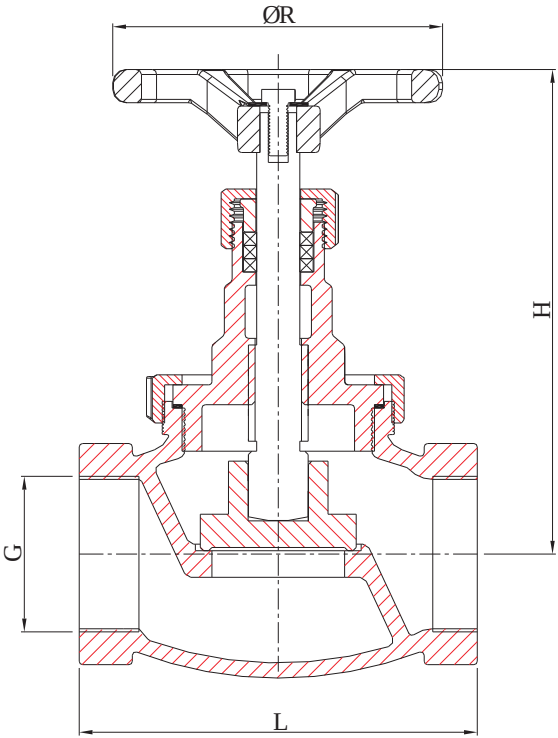

DIM/SIZE G	DN	ART. NR. STOP	ART. NR. SDNR	ART. NR. REGULATING	L mm	H mm	ØR mm	WEIGHT kg
3/8"	10	091002	091032	.091052	60	102	63	0,63
1/2"	15	091003	091033	.091053	65	102	63	0,62
3/4"	20	091004	091034	.091054	75	117	80	0,98
1"	25	091005	091035	.091055	90	124	80	1,40
1 1/4"	32	091006	091036	.091056	105	130	90	2,00
1 1/2"	40	091007	091037	.091057	120	147	100	3,10
2"	50	091008	091038	.091058	145	172	125	4,40
2 1/2"	65	091009	091039	.091059	170	180	160	6,00
3"	80	091010	091040	.091060	200	230	200	8,00

Angle run can be delivered on request