

GLOBE VALVE STRAIGHT – PN 16

Typical application: Marine & industry for oil, water, seawater +++


Max. temperature: 180°C

Options:

- Non return version (SDNR) with spring
- Regulating cone
- ANSI & JIS flange drilling



PART	MATERIAL
Body	Bronze CuSn5Zn5Pb5-C (Rg5)
Disc	CuSn5Zn5Pb5-C (Rg5)
Stem	CuZn35Ni (Som59)
Gasket	Graphite

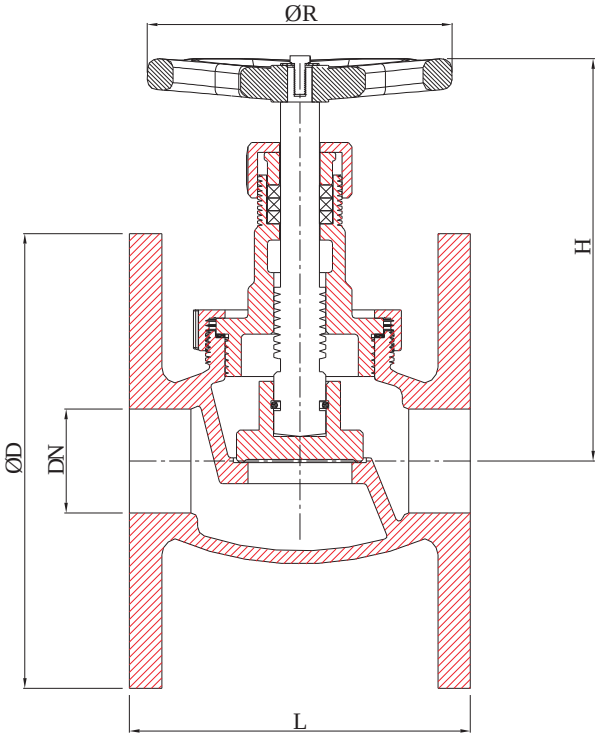

DN	ART. NR. FAST/FIXED	ART. NR. SDNR	ART. NR. REG. CONE	ØD mm	L mm	H mm	ØR mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 120°C	MAX WORK PRESS. TEMP 120°C – 180°C
15	091233			95	130	165	120	3,8	16 BAR	10 BAR
20	091234			105	150	165	120	4,2	16 BAR	10 BAR
25	091235			115	160	175	140	5,0	16 BAR	10 BAR
32	091236			140	180	180	140	7,0	16 BAR	10 BAR
40	091237			150	200	220	160	11,0	16 BAR	10 BAR
50	091238			165	230	230	160	13,0	16 BAR	10 BAR
65	091239			185	290	245	180	18,0	16 BAR	10 BAR
80	091240			200	310	295	200	22,0	16 BAR	10 BAR
100	091241			220	350	330	225	34,0	16 BAR	10 BAR
125	091242			250	400	365	250	48,0	16 BAR	10 BAR
150	091243			285	480	420	300	70,0	16 BAR	10 BAR

EN 10204 – 3.1 certificate available. *Free topp