


GLOBE VALVE STRAIGHT – PN 16

Typical application: Marine & industry for oil, water, seawater +++


Max. temperature: 180°C

Options:

- Non return version (SDNR) with spring
- Regulating cone
- ANSI & JIS flange drilling

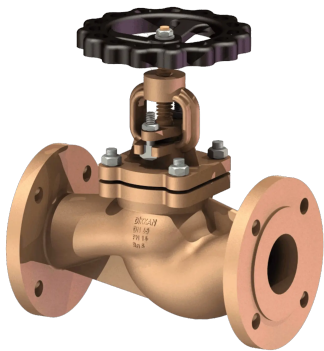

PART	MATERIAL
Body	Bronze CuSn5Zn5Pb5-C (Rg5)
Bisc	CuSn5Zn5Pb5-C (Rg5)
Stem	CuZn35Ni (Som59)
Gasket	Graphite

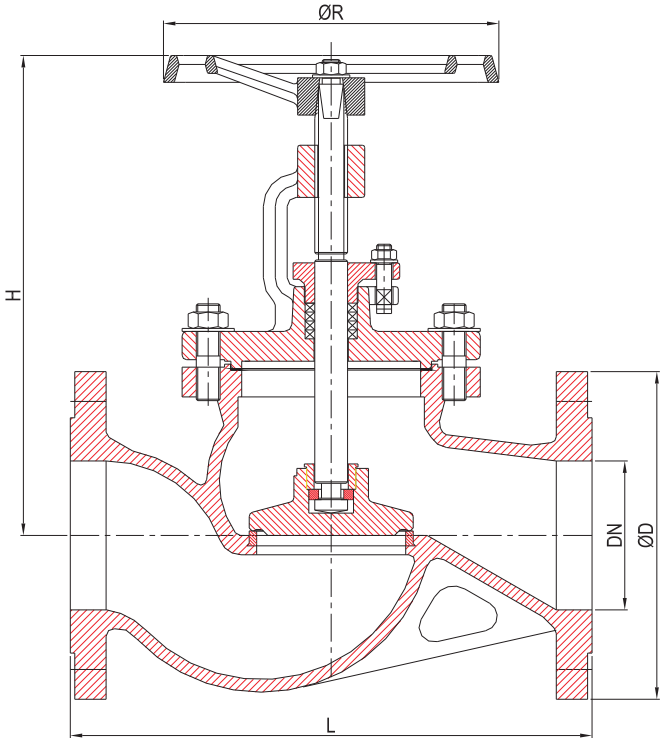

DN	ART. NR. FAST/FIXED	ART. NR. SDNR	ART. NR. REG. CONE	ØD mm	L mm	H mm	ØR mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 120°C	MAX WORK PRESS. TEMP 120°C – 200°C
15		091233		95	130	165	120	3,8	16 BAR	10 BAR
20		091234		105	150	165	120	4,2	16 BAR	10 BAR
25		091235		115	160	175	140	5,0	16 BAR	10 BAR
32		091236		140	180	180	140	7,0	16 BAR	10 BAR
40		091237		150	200	220	160	11,0	16 BAR	10 BAR
50		091238		165	230	230	160	13,0	16 BAR	10 BAR
65		091239		185	290	245	180	18,0	16 BAR	10 BAR
80		091240		200	310	295	200	22,0	16 BAR	10 BAR
100		091241		220	350	330	225	34,0	16 BAR	10 BAR
125		091242		250	400	365	250	48,0	16 BAR	10 BAR
150		091243		285	480	420	300	70,0	16 BAR	10 BAR

EN 10204 – 3.1 certificate available. *Free topp