

GLOBE VALVE STRAIGHT – PN 40

Typical application: Marine & industry for hydraulics, steam, air +++
Can be DNV certified for overboard.


Max temperature: 180°C

Options:

- Non return version (SDNR) with spring
- Regulating cone
- ANSI & JIS flange drilling



PART	MATERIAL
Body	Cast steel GS C25 N
Seat	AISI 304 (1.4301)
Disc (<65)	X20Cr13 (1.4021)
Disc (>65)	Støpestål/CS (GS C25 N)
Stem	X20Cr13 (1.4021)
Gasket	Graphite

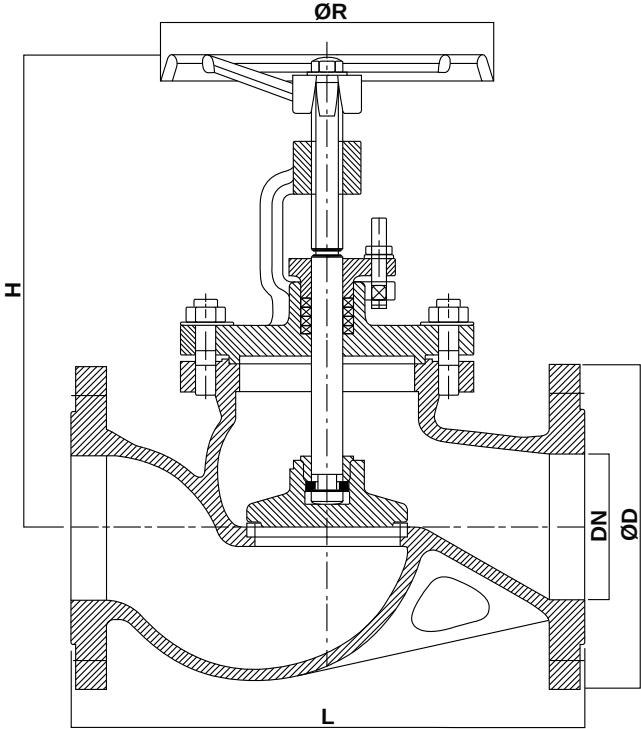

DN	ART. NR. FAST/FIXED	ART. NR. SDNR	ART. NR. REG. CONE	ØD mm	L mm	H mm	ØR mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 120°C
15	090203	090233	–	95	130	165	120	4,0	40 BAR
20	090204	090234	–	105	150	165	120	4,5	40 BAR
25	090205	090235	–	115	160	175	140	5,0	40 BAR
32	090206	090236	–	140	180	180	140	7,0	40 BAR
40	090207	090237	–	150	200	220	160	11,0	40 BAR
50	090208	090238	–	165	230	230	160	13,0	40 BAR
65	090209	090239	–	185	290	245	180	19,0	40 BAR
80	090210	090240	–	200	310	295	200	25,0	40 BAR
100	090211	090241	–	235	350	330	225	35,0	40 BAR
125	090212	090242	–	270	400	365	250	58,0	40 BAR
150	090213	090243	–	300	480	420	300	80,0	40 BAR

EN 10204 – 3.1 certificate available. *Free top