

JMC DN 50 – 1000

LUG TYPE BUTTERFLYVALVE

Valve design with anchored seat suitable for demanding high pressure/velocity applications.

Bidirectional drop tight

Wafer & lug type


Available as "flat Face" for GRP pipes

Flange drilling & pressure class:

PN 10/25 – ANSI Cl. 150 – JIS 5K/16K



PART	MATERIAL
Body	Ductile Iron GGG 40.3 / EN-GJS-400-18
Disc	Alu/Brz C958 +++++
Stem	13 % Cr.
Gasket	EPDM & NBR
Bearings	PTFE

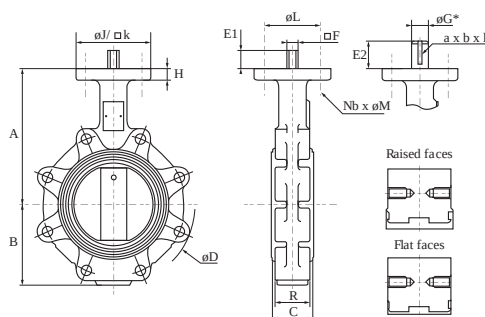

DN	A mm	B mm	C mm	ØD mm	E1 mm	F mm	E2 mm	ØG mm	H mm	J mm	K mm	L mm	NB mm	M mm	A mm	B mm	L mm	WEIGHT kg
50	110	74	43	94	25,5	11	–	–	14	90	–	70	4	9	–	–	2,8	2,8
65	118	81	46	107	25,5	11	–	–	14	90	–	70	4	9	–	–	3,3	3,3
80	125	93	46	126	25,5	11	–	–	14	90	–	70	4	9	–	–	4	4
100	140	107	52	150	25,5	14	–	–	16	–	100	102	4	11	–	–	6	6
125	160	122	56	179	25,5	14	–	–	16	–	100	102	4	11	–	–	8,5	8,5
150	175	135	56	204	25,5	19	–	–	17	–	100	102	4	11	–	–	11	11
200	206	170	60	259	25,5	19	–	–	17	–	100	102	4	11	–	–	15	15
250	247	200	68	313	36	27	70*	35*	17	–	132	125	4	14	8*	60*	23	23
300	277	233	78	369	36	27	70*	35*	17	–	132	125	4	14	8*	60*	31	31
350	300	270	78	418	36	27	70*	35*	17,5	–	132	125	4	14	8*	60*	39	39
400	345	300	102	467	43	32	90,5*	40*	21	–	132	140	4	18	8*	73*	69	69
450	375	330	114	521	49	36	100*	50*	22	–	140	140	4	18	9*	60*	83	83
500	425	375	127	571	63	46	100*	60*	25	210	–	165	4	22	11*	80*	107	107
600	495	430	154	670	63	46	100*	60*	25	210	–	165	4	22	11*	80*	145	145
700	570	510	165	776	81	55	110*	80*	30	300	–	254	8	18	14*	100	217	217
750	610	531	165	843	81	55	110*	80*	30	300	–	254	8	18	14*	100	275	275
800	640	560	190	882	81	55	110*	80*	30	300	–	254	8	18	14*	100	310	310
900	700	665	203	1000	–	–	110	100	30	300	–	254	8	18	16	100	448	448
1000	750	715	216	1105	–	–	110	100	30	350	–	298	8	22	16	100	530	530

EN 10204 – 3.1 certificate available.

NOTE: Byggemål/Face to face ISO 5752 serie 20 – NF E 29305 serie 20 – MSS SP 67 – API 609