

QUICK CLOSING VALVE, ANGLE – PN 16/10

Optional release via manual, pneumatic or hydraulic operation of standard cylinder.
Type approved by DNV, LRS, ABS, BV & GL

Service:


System for flammable medium in which remote operated and quick closing function are required.

Options:

Materials, flange standard and pos. indication.



PART	MATERIAL
Body	Ductile Iron GGG 40.3
Seat	AISI 304
Disc	AISI 304
Stem	AISI 304

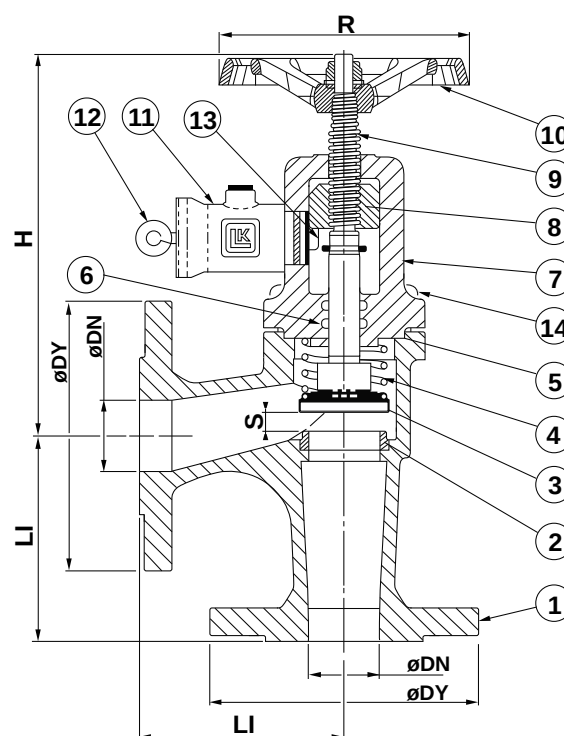

DN	ART. NR.	FLANGE	ØD mm	L mm	H mm	S mm	ØM mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 120°C	MAX WORK PRESS. TEMP 120°C – 180°C
15	5576535	PN 16	95	90	169	7,5	120	5,0	16 BAR	10 BAR
20	5576537	PN 16	105	95	170	7,5	120	5,6	16 BAR	10 BAR
25	5576539	PN 16	115	100	179	8	120	6,4	16 BAR	10 BAR
32	5576542	PN 16	140	105	186	8	120	8,3	16 BAR	10 BAR
40	5576544	PN 16	150	115	205	10	140	9,9	16 BAR	10 BAR
50	5576546	PN 16	165	125	204	12,5	140	14,0	16 BAR	10 BAR
65	5576548	PN 16	185	145	233	16,5	140	18,0	16 BAR	10 BAR
80	5576551	PN 16	200	155	252	20	160	25,0	16 BAR	10 BAR
100	5576453	PN 16	220	175	278	25	160	41,0	16 BAR	10 BAR
125	5576555	PN 20	250	200	295	32	200	47,0	16 BAR	10 BAR
150	5576557	PN 20	285	225	335	37,5	200	63,0	16 BAR	10 BAR
200	5576559	PN 20	340	275	458	50	400	150,0	10 BAR	6 BAR
250	5576562	PN 10	405	325	463	63	400	230,0	10 BAR	6 BAR

EN 10204 – 3.1 certificate available * Free top