

# REDUCTION VALVE

## HABEDO D – 22


Typical application: Primary for air. Is also suited for gasses that are not poisonous or flammable.

### Pressure area:

Inlet pressure max. 40 Bar.  
Outlet pressure 1 – 10 Bar.



| PART NAME      | MATERIAL            |
|----------------|---------------------|
| House          | 1/4" – 1 1/4" Brass |
| House(2)       | 1 1/2" – 2" bronze  |
| Threads        | BSP                 |
| Insert part    | Perbunan            |
| Diaphragm      | Perbunan            |
| P. gauge conn. | 1/4"                |

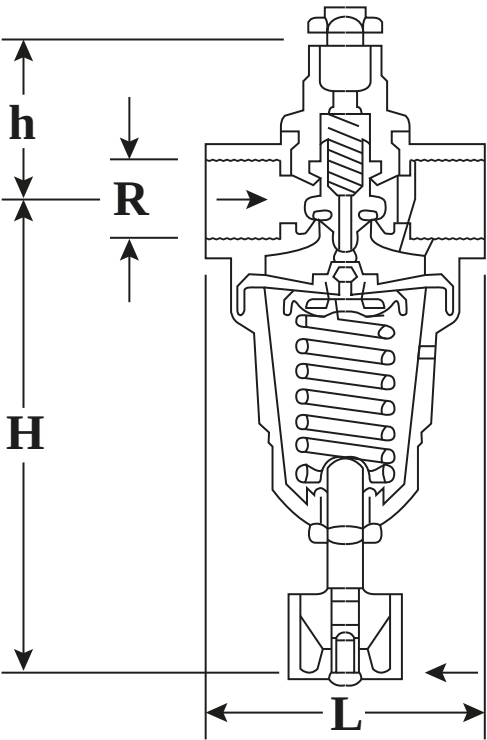

| DIM    | ART. NR. | L mm | H mm | H mm | WEIGHT kg |
|--------|----------|------|------|------|-----------|
| 1/4"   | 5627103  | 50   | 90   | 34   | 0,70      |
| 3/8"   | 5627106  | 50   | 90   | 34   | 0,70      |
| 1/2"   | 5627109  | 65   | 105  | 36   | 0,90      |
| 3/4"   | 5627113  | 80   | 105  | 42   | 0,90      |
| 1"     | 5627116  | 95   | 150  | 57   | 1,50      |
| 1 1/4" | 5627119  | 105  | 160  | 57   | 1,80      |
| 1 1/2" | 5627123  | 115  | 200  | 72   | 3,00      |
| 2"     | 5627126  | 130  | 210  | 72   | 3,00      |