

RVA 04LT – PN 16 (10)

LUG BUTTERFLY VALVE




Typical application: HVAC

Temperature range: -15 / +120 deg. C

Design: Long neck

Flange drilling: PN 16(10)

Manual operators: DN 50 – 150 lever, DN 200 – 300 gear

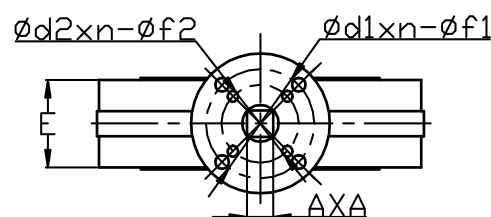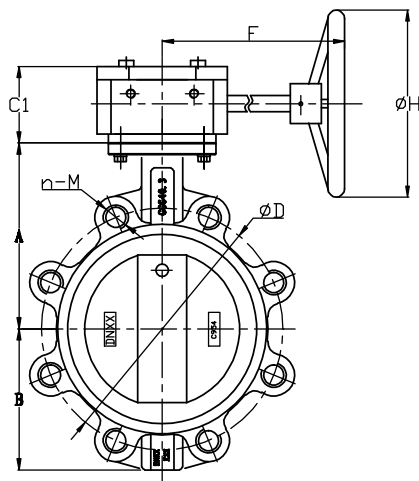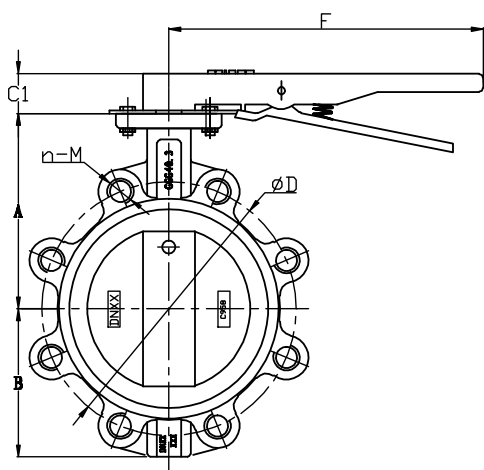

PART	MATERIAL
Body	Ductile Iron GGG 40.3/EN-GJS-400-18
Disc	AISI 316
Stem	AISI 316
Taper pin	Monel
Gasket	EPDM
Foringer/Bearings	PTFE

DN	ART. NR. MANUAL	ART. NR. FREE TOP	AXA mm	ISO TOP	E mm	A mm	B mm	C mm	C1 mm	F mm	H mm	VEKT kg*	PRESSURE RATING
40	5560021		11	F07	33	120	75	30	32	267		2,6	PN 16
50	5560022		11	F07	43	161	80	30	32	267		4,2	PN 16
65	5560023		11	F07	46	175	89	30	32	267		5,0	PN 16
80	5560024		11	F07	46	181	95	30	32	267		6,5	PN 16
100	5560025		14	F07	52	200	114	30	32	267		8,0	PN 16
125	5560026		14	F07	56	213	127	30	32	267		10,2	PN 16
150	5560027		17	F07	56	226	140	30	32	267		12,0	PN 16
200	5560028		17	F07/10	60	260	175	35	77	236	290	17,0	PN 10
250	5560029		22	F10	68	292	220	38	77	227	290	28,2	PN 10
300	5560031		27	F12	78	337	255	38	77	227	290	44,0	PN 10

EN 10204 – 3.1 certificate available. *Free top