

RVA 13GE – PN 16 (10)





BUTTERFLYVALVE WITH GROOVED ENDS

Typical application: SHIP & INDUSTRY

Temperature range: -15 / +80 deg. C

Mounting with Grinnel/Victaulic couplings

Manual operators: DN 50 – 150 lever, DN 200 – 300 gear

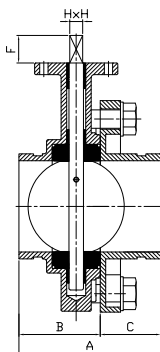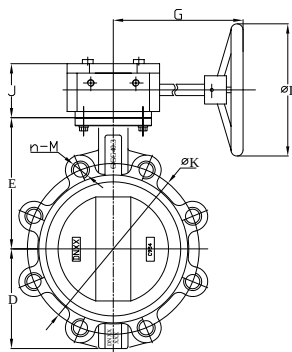

PART	MATERIAL
Body	Ductile Iron GGG 40.3/EN-GJS-400-18
Disc	Alu/Brz C958
Stem	AISI 316
Taper pin	Monel
Gasket	NBR (BUNA-N)
Bearings	PTFE
Bolts	8.8 Galv

DN / OD	ART. NR. MANUAL	ART. NR. FREE TOP	HxH mm	ISO TOP	A mm	B mm	C mm	D mm	E mm	F mm	G mm	J mm	I mm	ØK	n-M	VEKT kg*	PRESSURE RATING
50 / 60,3	5560662	5560622	11	F05/07	133,3	76,3	57	80	124	30	267			125	4-M16	6,7	PN 16
65 / 76,1	5560663	5560623	11	F05/07	138,6	79,8	58,8	89	134	30	267			145	4-M16	8,1	PN 16
80 / 88,9	5560664	5560624	11	F05/07	139,1	80,3	58,8	95	141	30	267			160	8-M16	10,5	PN 16
100 / 114,3	5560665	5560625	14	F05/07	153,4	88	65,4	114	156	30	267			180	8-M16	13,2	PN 16
125 / 139,7	5560666	5560626	14	F07	161,9	91,5	70,4	127	168	30	267			210	8-M20	16,3	PN 16
150 / 168,3	5560667	5560627	17	F07	172	102	70	140	184	30	267			240	8-M20	22,4	PN 16
200 / 219,1	5560668	5560628	17	F07/10	185	110	75	175	213	35	233	77	290	295	8-M20	31,3	PN 10
250 / 273	5560669	5560629	22	F10	199	122	77	221	244	38	266	77	290	350	12-M20	?	PN 10
300 / 323	5560671	5560631	27	F12	213	135,5	77,5	255	283	38	266	77	290	400	12-M20	?	PN 10

EN 10204 – 3.1 certificate available. *Free top