

RVA 13LT – PN 16 (10)

LUG BUTTERFLY VALVE





Typical application: Marine & industry

Temperature range: -15 / +80 deg. C

Flange drilling: PN 16(10)

Manual operators: DN 50 – 150 lever, DN 200 – 600 gear

DNV test. cert. on request

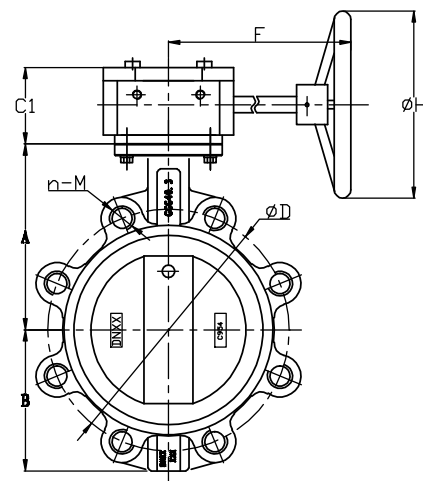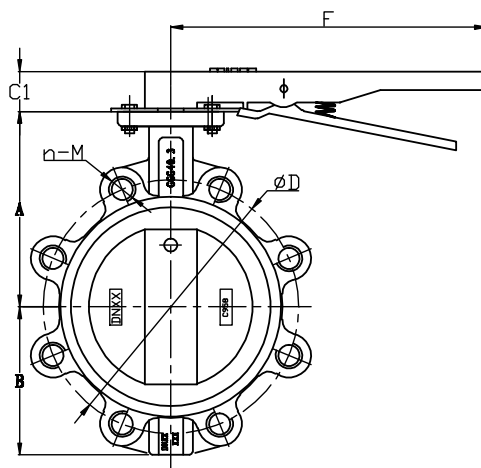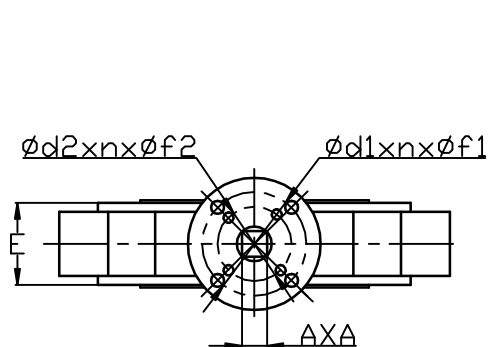

PART	MATERIAL
Body	Ductile Iron GGG 40.3/EN-GJS-400-18
Disc	Alu/Brz C958
Stem	AISI 316
Taper pin	Monel
Gasket	NBR / Nitril
Bearings	PTFE

DN	ART. NR. MANUAL	ART. NR. FREE TOP	AXA mm	ISO TOP	E mm	A mm	B mm	C mm	C1 mm	F mm	H mm	VEKT kg	PRESSURE RATING
40	5560141	5560101	11	F07	33	120	75	30	32	267		2,6	PN 16
50	5560142	5560102	11	F07	43	124	80	30	32	267		4,2	PN 16
65	5560143	5560103	11	F07	46	134	85	30	32	267		5,0	PN 16
80	5560144	5560104	11	F07	51	141	95	30	32	267		6,5	PN 16
100	5560145	5560105	14	F07	56	156	114	30	32	267		8,0	PN 16
125	5560146	5560106	14	F07	66	184	127	30	32	267		10,2	PN 16
150	5560147	5560107	17	F07	66	213	145	38	77	236	290	17,0	PN 10
200	5560148	5560108	17	F10	71	234	175	38	77	236	290	23,0	PN 10
250	5560149	5560109	22	F10	68	244	220	38	77	227	290	28,2	PN 10
300	5560150	5560110	27	F12	78	283	255	38	77	227	290	44,0	PN 10
350	5560152	5560112	27	F12	78	368	268	38	77	227	290	68,0	PN 10
400	5560153	5560113	36	F12	92	398	320	38	90	250	290	89,0	PN 10
450	5560154	5560114	36	F14	114	422	365	38	90	250	290	105,0	PN 10
500	5560155	5560115	36	F14	122	479	380	38	105	250	290	129,0	PN 10
600	5560156	5560116	46	F16	154	562	445	38	147	350	290	277,0	PN 10
700		5560117											PN 10
800		5560118											PN 10

EN 10204 – 3.1 certificate available. *Free top