

RVA 14GE – PN 25 (20)





BUTTERFLYVALVE WITH GROOVED ENDS

Typical application: SHIP & INDUSTRY

Temperature range: -15 / +100 deg. C

Mounting with Grinnel/Victaulic couplings

Manual operators: DN 50 – 150 lever, DN 200 gear

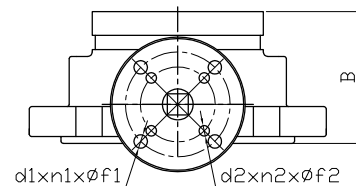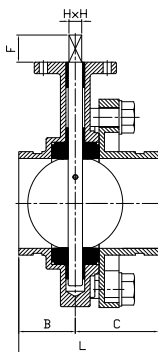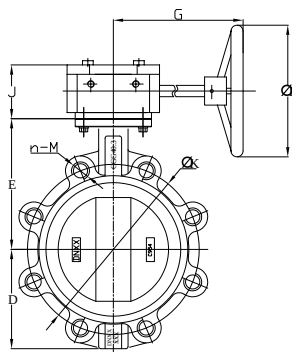

PART	MATERIAL
Body	Ductile Iron GGG 40.3 / EN-GJS-400-18
Disc	Alu/Brz C958
Stem	AISI 316
Taper pin	Monel
Gasket	NBR (BUNA-N)
Bearings	PTFE
Bolts	8.8 Galv

DN / OD	ART. NR. MANUAL	ART. NR. FREE TOP	HxH MM	ISO TOP	A mm	B mm	C mm	D mm	E mm	F mm	G mm	J mm	I mm	ØK	n-M	VEKT kg*	PRESSURE RATING
50 / 60,3	5560692	5560682	11	F05/07	133,3	76,3	57	80	124	30	267			125	4-M16	6,7	PN 25
65 / 76,1	5560693	5560683	11	F05/07	138,6	79,8	58,8	89	134	30	267			145	8-M16	9,2	PN 25
80 / 88,9	5560694	5560684	11	F05/07	139,1	80,3	58,8	95	141	30	267			160	8-M16	10,5	PN 25
100 / 114,3	5560695	5560685	14	F05/07	153,4	88	65,4	114	156	30	267			190	8-M20	14,1	PN 25
125 / 139,7	5560696	5560686	14	F07	161,9	91,5	70,4	127	168	30	267			220	8-M24	19,4	PN 25
150 / 168,3	5560697	5560687	17	F07	172	102	70	140	184	30	267			250	8-M24	24,3	PN 25
200 / 219,1	5560698	5560688	17	F07/10	185	110	75	175	213	35	233	77	290	310	12-M24	35,3	PN 20

EN 10204 – 3.1 certificate available. *Free top