

RVA 14LT – PN 25 (20)


LUG BUTTERFLY VALVE

Typical application: High pressure systems for mud & brine
Temperature range: -15 / +80 deg. C
Manual operators: DN 50 – 150 lever, DN 200 gear

DNV test cert. on request



DIM	PRESSURE CLASS	FLANGE DRILLING
DN 50 – 150	PN 25	PN 40
DN 200	PN 20	PN 25

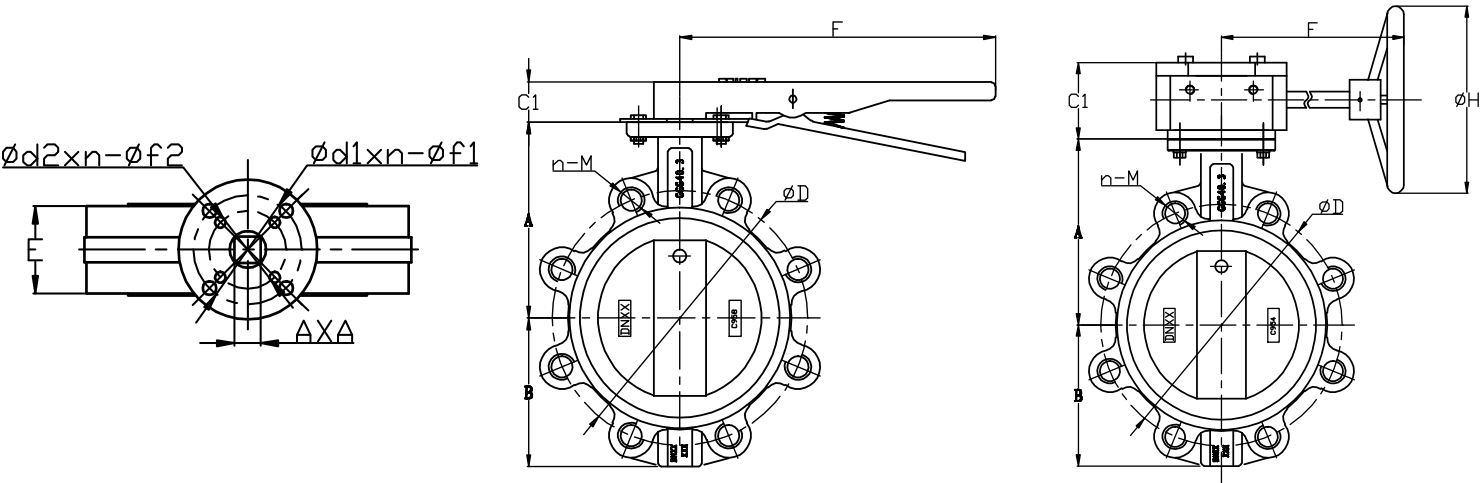

PART	MATERIAL
Body	Ductile Iron GGG 40.3/EN-GJS-400-18
Disc	Alu/Brz C958
Stem	17.4Ph
Taper pin	Monel
Gasket	NBR / Nitril
Bearings	PTFE

DN	ART. NR. MANUAL	ART. NR. FREE TOP	AxA mm	ISO TOP	E mm	A mm	B mm	Ø mm	Ø1 mm	F mm	H mm	VEKT kg	PRESSURE RATING
50	5560222	5560202	11	F07	43	124	80	30	32	267		2,8	PN 25
65	5560223	5560203	11	F07	46	134	89	30	32	267		3,2	PN 25
80	5560224	5560204	11	F07	46	141	95	30	32	267		4,3	PN 25
100	5560225	5560205	14	F07	52	156	114	30	32	267		5,4	PN 25
125	5560226	5560206	14	F07	56	168	127	30	32	267		7,5	PN 25
150	5560227	5560207	17	F07	56	184	140	30	32	267		9,3	PN 25
200	5560228	5560208	17	F07/10	60	213	175	35	77	236	290	12,8	PN 20

EN 10204 – 3.1 certificate available. *Free top