

RVA 17LT – PN 16




LUG BUTTERFLY VALVE

Typical application: Marine & industry

Temperature range: -15 / +80 deg. C

Flange drilling: PN 16

Manual operators: DN 200 – 300 gear

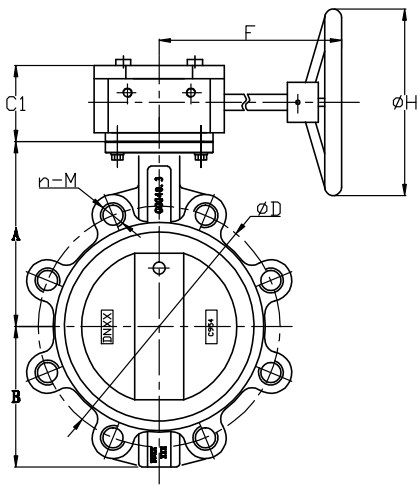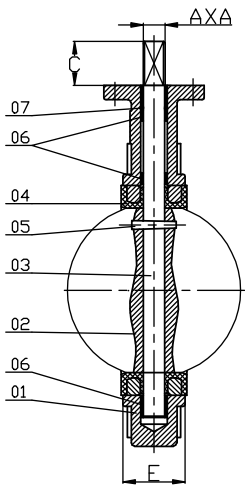

PART	MATERIAL
Body	Ductile Iron GGG 40.3/EN-GJS-400-18
Disc	Alu/Brz C958
Stem	AISI 316
Taper pin	Monel
Gasket	NBR / Nitril
Bearings	PTFE

DN	ART. NR. MANUAL	ART. NR. FREE TOP	AxA mm	ISO TOP	E mm	A mm	B mm	Ø mm	Ø1 mm	F mm	H mm	VEKT kg	PRESSURE RATING
200		5560128	17	F07/10	60	213	175	35	77	236	290	17,0	PN 16
250		5560129	22	F10	68	244	220	38	77	227	290	28,2	PN 16
300		5560131	27	F12	78	283	255	38	77	227	290	44,0	PN 16

EN 10204 – 3.1 certificate available. *Free top