


RVA 19LT – PN 16 (10)

LUG BUTTERFLY VALVE

Typical application: Mineral acids, oils and hydrocarbons
Temperature range: – 20 / + 135 deg. C

Flange drilling: PN 16 (10)
Manual operators: DN 50 – 150 lever, DN 200 gear

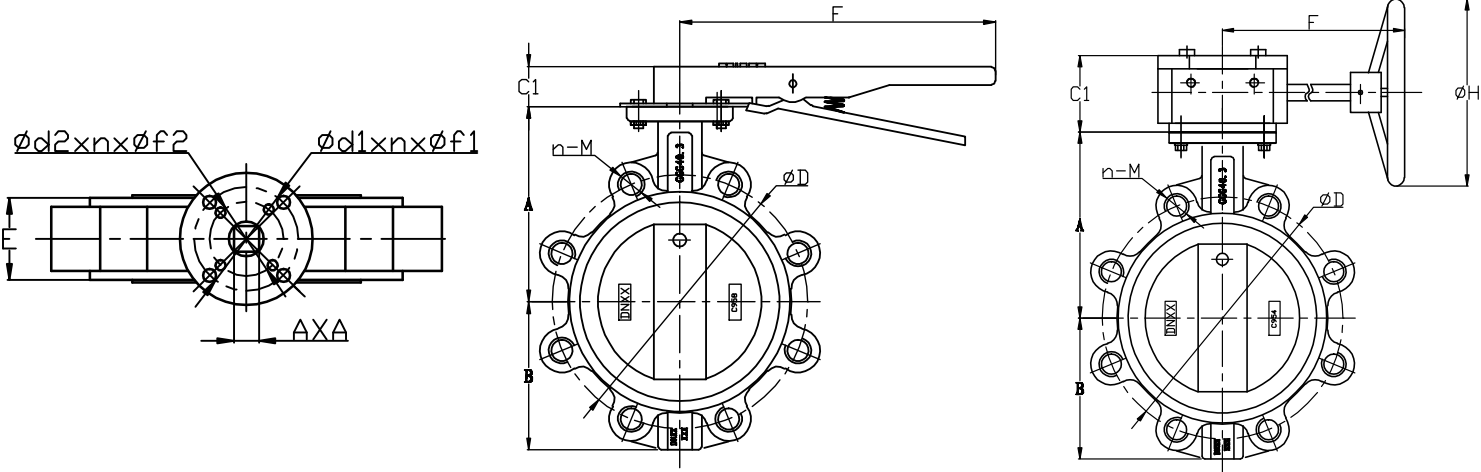

PART	MATERIAL
Body	Ductile Iron GGG 40.3/EN-GJS-400-18
Disc	AISI 316
Stem	AISI 316
Taper pin	Monel
Gasket	Viton
Bearings	PTFE

DN	ART. NR. MANUAL	ART. NR. FREE TOP	AxA mm	ISO TOP	E mm	A mm	B mm	Ø mm	Ø1 mm	F mm	H mm	VEKT kg	PRESSURE RATING
50	5560362	5560242	11	F07	43	124	80	30	32	267		4,2	PN 16
65	5560363	5560243	11	F07	46	134	89	30	32	267		5,0	PN 16
80	5560364	5560244	11	F07	46	141	95	30	32	267		6,5	PN 16
100	5560365	5560245	14	F07	52	156	114	30	32	267		8,0	PN 16
125	5560366	5560246	14	F07	56	168	127	30	32	267		10,2	PN 16
150	5560367	5560247	17	F07	56	184	140	30	32	267		12,0	PN 16
200	5560368	5560248	17	F07/10	60	213	175	35	77	236	290	17,0	PN 10

EN 10204 – 3.1 certificate available. *Free top