

RVA #GE

BUTTERFLYVALVE FOR MOUNTING WITH COUPLINGS TYPE GRINNELL / VICTAULIC

RVA #GE 2 valves in one

Valve body casted with one side as standard lug type and the other with grooved end for couplings type Grinnell & Victaulic. These valves are as standard delivered with mounted adapter flange on the lug side.

This version is intended for mounting with couplings on both sides.

By removing the adapter flange the valve can be mounted against flange as standard lug type butterflyvalve.

The valve is type approved for mounting as overboard valve. The lug side can be mounted against any component with standard flanges.

Further pipe connection via couplings.




PATENTED

DNV type approved

- Reduced installation time
- No need for expensive special components
- No welding or mounting of bolts
- Accomodates higher tolerences in pipe alignment if mounted with flexible couplings.
- Minimizes risk for wrong installation.
- Easy dismounting from piping system
- Can be mounted in any position and independent of bolt positions.

Information and technical data are given as guidance only

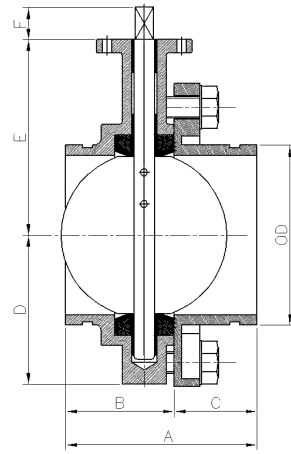

GRINNELL MOUTING

