

SAFETY VALVE
GØTZE 618 T

Typical application: Red brass angular overflow / control valves. Gass, vapor and gass-mediums.

Pressure area:


- 0,2 – 0,8 Bar
- 0,5 – 2,5 Bar
- 12 – 20 Bar
- Loose spring

Max. temperature:

225⁰ C



PART NAME	MATERIAL
Body	Brass – RG.5
Innvendige deler/Internal	Brass
Sealing	P.T.F.E

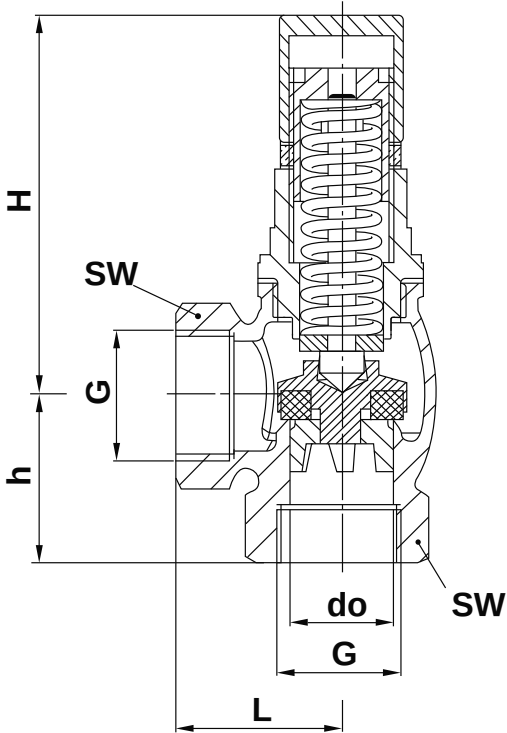

THREADS	ART. NR.	PRESSURE	L mm	H mm	H mm	DO mm	WEIGHT kg
3/8"	140011	2 – 12 bar	27,0	65,0	26,0	10,0	0,29
1/2"	140012	2 – 12 bar	30,0	71,0	30,0	13,0	0,42
3/4"	140013	2 – 12 bar	33,0	79,0	35,0	19,0	0,59
1"	140014	2 – 12 bar	40,0	95,0	41,0	35,0	1,00
1 1/4"	140015	2 – 12 bar	45,0	110,0	45,0	30,0	1,75
1 1/2"	140016	2 – 12 bar	50,0	135,0	51,0	38,0	2,30
2"	140017	2 – 12 bar	60,0	140,0	60,0	50,0	3,30