

SELF CLOSING VALVE STRAIGHT


Lever operated, spring loaded self closing valve. Type approved by major class societies

Options:

- Flanged to ANSI or JIS
- Other materials available
- Available with handwheel



PART	MATERIAL
Body	Ductile iron EN-GJS400
Body sea	AISI 304
Disc	AISI 420 (1.4021)
Disc seal	PTFE
Stem	AISI 420 (1.4021)
Bolts	Steel
Gaskets	Graphite
Spring	1.4310 spring steel

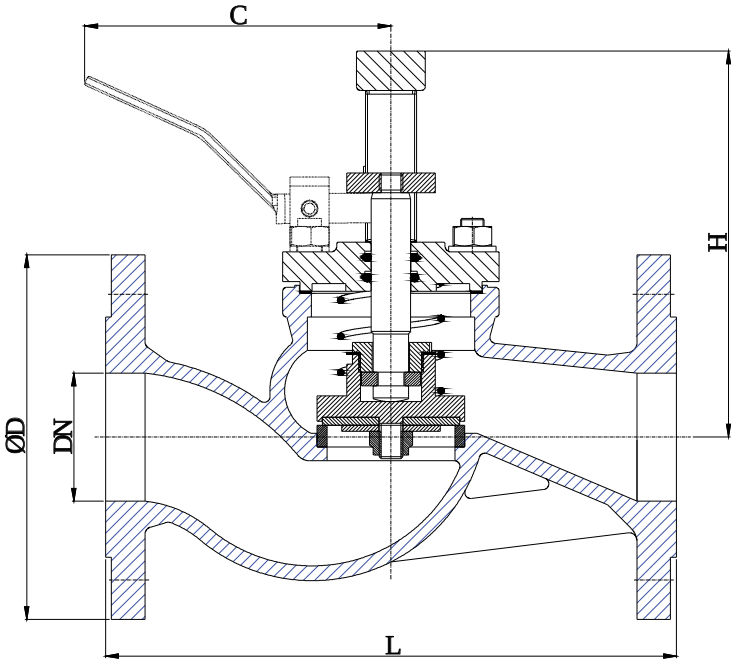

DN	ART. NR.	ØD mm	L mm	H mm	C mm	WEIGHT kg	PRESSURE/TEMP	FLANGE DRILLING
15		95	130	130	140	3,7	PN 16* – 120 °C	PN 16
20		105	150	130	140	4,0	PN 16* – 120 °C	PN 16
25		115	160	145	140	5,0	PN 16* – 120 °C	PN 16
32		140	180	145	140	6,0	PN 16* – 120 °C	PN 16
40		150	200	160	150	10,0	PN 16* – 120 °C	PN 16
50		165	230	165	150	12,0	PN 16* – 120 °C	PN 16
65		185	290	200	160	16,0	PN 16* – 120 °C	PN 16
80		200	310	220	165	22,0	PN 16* – 120 °C	PN 16
100		220	350	250	190	32,0	PN 16* – 120 °C	PN 16