

SHORT FF BALL VALVE, CAST STEEL – PN 16


Full bore. Lug version.
Flange drilling: PN 16 (threaded)

Alternatives:

Material AISI 316 & Ductile iron



NO	PART	MATERIAL
1	Body	Cast Steel A216 WCB
2	Body seal	PTFE
3	End cap	Cast Steel A216 WCB
4	Seat	RTFE
5	Ball	AISI 316
6	Washer	PTFE
7	O-ring	VITON
8	Stem	AISI 316
9	Stem packing	PTFE
10 til 17	Gland details	AISI 304

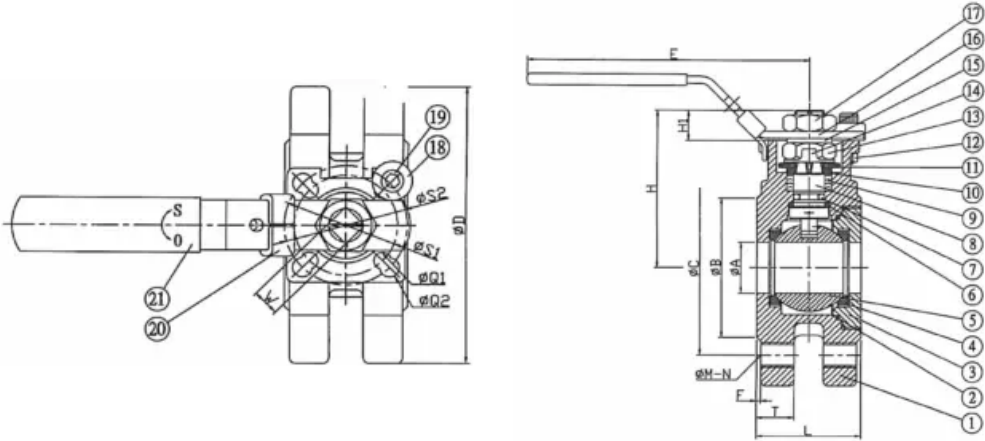

DN	ART. NR. MANUAL	øA mm	L mm	øD mm	H mm	H1 mm	W mm	E mm	S1 mm	S2 mm	PRESSURE RATING
15	080203	15	40,8	95,0	67,0	12,0	9,0	135,0	42,0		PN 16
20	080204	20	44,0	105,0	69,5	12,0	9,0	135,0	42,0		PN 16
25	080235	25	50,0	115,0	76,1	13,5	11,0	142,0	42,0	50,0	PN 16
32	080206	32	60,0	140,0	88,5	13,5	11,0	142,0	42,0	50,0	PN 16
40	080207	40	65,0	150,0	102,0	16,0	14,0	200,0	50,0	70,0	PN 16
50	080208	50	81,0	165,0	110,6	16,0	14,0	200,0	50,0	70,0	PN 16
65	080209	65	110,0	185,0	131,8	19,0	17,0	210,0	70,0	102,0	PN 16
80	080209	80	120,0	200,0	153,3	24,0	22,0	283,0	102,0	125,0	PN 16
100	080211	100	150,0	220,0	168,3	24,0	22,0	283,0	102,0	125,0	PN 16

EN 10204 – 3.1 certificate available. *Free top