

STORM VALVE ANGLE – PN 4


Closable drain and overboard discharge valve for sewage and waste water
Outlet flange is 2 dim bigger than inlet
Incl. 3.1 certificate

Options:

Can be delivered with indication and other flange drillings



PART	MATERIAL
Body	Ductile Iron GGG 40.3
Kjedge med tetning	Bronse Rg5 + NBR
Disc with seal	Bronze Rg5 + NBR
Stem	CuZn39Pb3 (Ms58)
Plug	CuZn39Pb3 (Ms58)

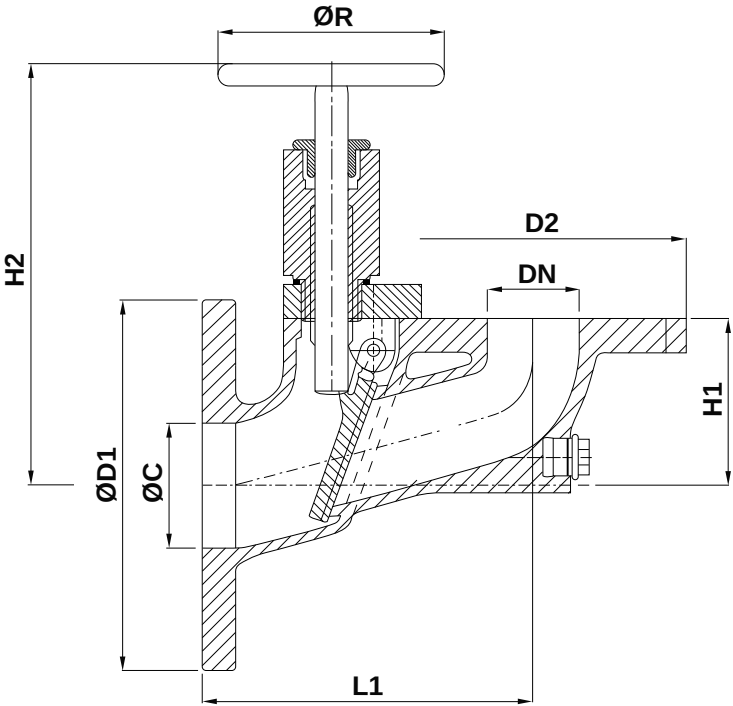

DN	ART. NR.	FLANGE	ØD1 mm	ØD2 mm	L1 mm	H1 mm	ØC mm	H2 mm	ØR mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 60°C
50	120238	PN 16	200	165	180	90	70	245	140	12,0	4 BAR
65	120239	PN 16	220	185	200	100	85	255		14,0	4 BAR
80	120240	PN 16	250	200	215	108	100	275	140	20,0	4 BAR
100	120241	PN 16	285	220	250	130	130	285	140	25,0	4 BAR
125	120242	PN 16	315	250	290	152	158	350	160	36,0	4 BAR
150		PN 16	340	285	330	176	190	365	160	43,0	
200		PN 10	395	340	425	180	240	360	160	72,0	4 BAR
250		PN 10	445	395	630	300	300	500	200	110,0	4 BAR
300		PN 10	565	445	650	300	400	500	200	150,0	4 BAR

Will be delivered with EN 10204- 3.1 certificate.