

STORM VALVE STRAIGHT – PN 4


Closable drain and overboard discharge
valve for sewage and waste water
Incl. 3.1 certificate

Options:

Can be delivered with indication and
other flange drillings



PART	MATERIAL
Body	Ductile Iron GGG 40.3
Kjægle med tetning	Bronze Rg5 + NBR
Disc with seal	Bronze Rg5 + NBR
Stem	CuZn39Pb3 (Ms58)
Plug	CuZn39Pb3 (Ms58)

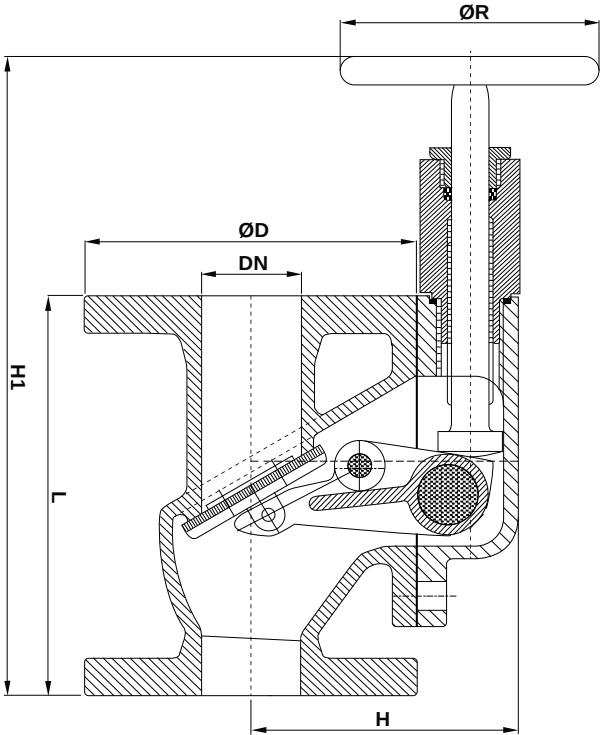

DN	ART. NR.	FLANGE	ØD mm	L mm	H mm	H1 mm	ØR mm	WEIGHT kg	MAX WORK PRESS. TEMP UP TO 60°C
50	120208	PN 16	165	200	140	310	140	15,0	4 BAR
65	120209	PN 16	185	240	150	350	140	22,0	4 BAR
80	120210	PN 16	200	260	185	390	140	27,0	4 BAR
100	120211	PN 16	220	300	200	435	140	35,0	4 BAR
125	120212	PN 16	250	350	220	495	160	50,0	4 BAR
150	120213	PN 16	285	400	245	530	160	67,0	4 BAR
200		PN 10	340	500	315	625	160	101,0	4 BAR
250		PN 10	395	600	400	750	200	150,0	4 BAR
300		PN 10	445	700	400	900	200	240,0	4 BAR

Will be delivered with EN 10204- 3.1 certificate