

TANK VENT CHECK VALVE FOR MUD

MUD1



Typical application:
For venting of mud tanks
Intended for mounting on open deck
Type approved by DNV / ABS

Options:

Stainless steel version
Other flange drillings
Available with flame- or bug net



NO	PART	MATERIAL
1	Body	Steel ST37 Galvanized
2	Valve flange	Steel ST37 Galvanized
3	Check valve	Steel ST37 Galvanized
4	Bracket	AISI 316L
5	Flange	Steel ST37 Galvanized
6	Cover	Steel ST37 Galvanized
7	Inspection hatch	Steel ST37 Galvanized

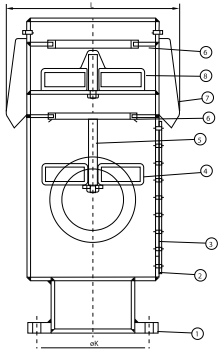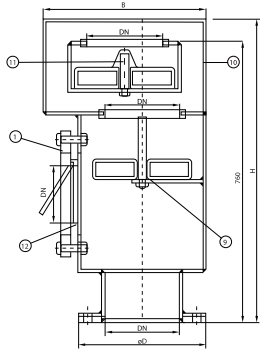

NS 2527/DIN PN10/16

DN	ART. NR. Standard	ØD mm	B mm	L mm	ØK mm	H mm	WEIGHT kg	FLANGE DRILLING
125		250	237	265	210	805	38,0	PN 16
150		285	302	335	240	820	62,0	PN 16
175		315	330	375	270	830	73,0	PN 16
200		340	432	435	395	835	95,0	PN 10
250		395	482	585	350	890	125,0	PN 10