

Y-FORM CHECK VALVE – PN 40


Port Bore: Full Bore
End: BSP, ISO – 228 Thread
Material: S/S; EN10213 – 4:1.4408;
ASTM A351 – CF8M
Pressure: 40 bar
Testing: According to API – 598 (EN12266 – 1,2)
Temp.: – 20°C to 200°C (-4°F to 392°F)



Opening pressure:

0,1 Bar

NR.	PART	MATERIAL
1	Body	EN1.4409
2	Bonnet	EN1.4409
3	Disc bonnet	EN1.4409
4	Spring	AISI 304
5	Washer	AISI 304
6	Nut	AISI 304
7	Disc	P.T.F.E.
8	Gasket	P.T.F.E.

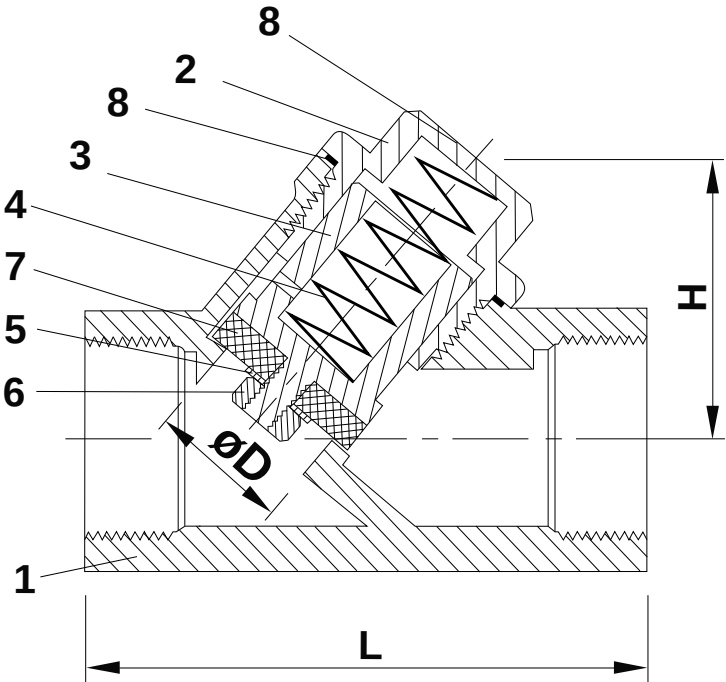

DIM/SIZE	DN	ART. NR. STOP	L mm	H mm	ØD mm	WEIGHT kg
1/4"	8	041120	57	32	10	0,25
3/8"	12	041121	57	32	10	0,25
1/2"	15	041122	61	37	15	0,28
3/4"	20	041123	70	41	20	0,40
1"	25	041124	86	47	25	0,60
1 1/4"	32	041125	100	54	32	0,90
1 1/2"	40	041126	111	62	38	1,15
2"	50	041127	138	76	51	1,65
2 1/2"	65	041128	170	110	65	3,60
3"	80	041129	195	130	80	5,00