

BRANNVENTIL FOR RILLEKUPLING – VINKEL


Ventil for montering med Grinnell/Victaulic rillekupper

Gjenget deksel, dobbel tetting.

Kan leveres med Storz slangekupling og kappe.



NR	DETALJ	MATERIALE
1	Hus	CuAl10Fe5Ni5-C (AlBr)
2	Deksel	CuAl10Fe5Ni5-C (AlBr)
3	Kjgle	CuAl10Fe5Ni5-C (AlBr)
4	Spindel	CuAl10Ni3Fe2-C
5	Tettningsring	NBR
6	Ratt	EN-GJL250 (GG25)

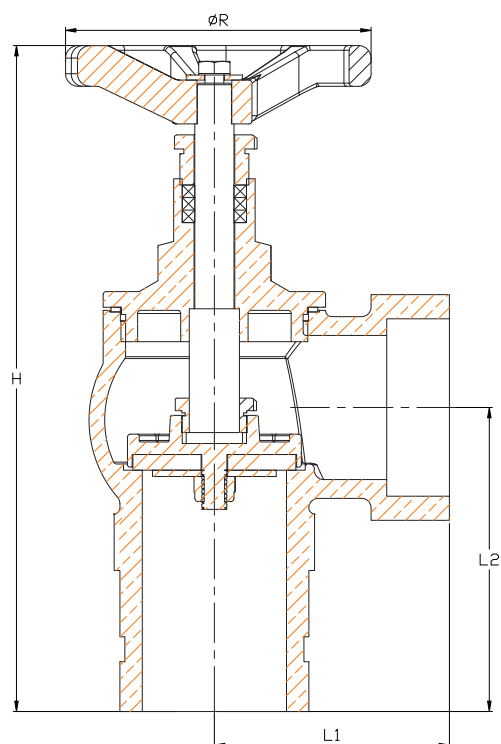

DN	ART. NR.	FLENS	H (OPEN) mm	H (CLOSED) mm	L1 mm	L2 mm	R mm	VEKT kg	MAX ARB. TRYKK TEMP UP TO 80°C
50	120270	PN 16	232	213	75	98	100	4,0	16 BAR

EN 10204 – 3.1 Sertifikat tilgjengelig