

BRANNVENTIL RG.5 – VINKEL

Flenset utførelse, boret PN 16


Boltet deksel og dobbel tetning

Komplett med Storz slangekupling og kappe.


Maks. temperatur: 80°C

Alternativ:

ANSI, JIS m.m. flenseboringer



DETALJ	MATERIALE
Hus	G-CuSn5ZnPb
Kjegle	CuZn39Pb3
Spindel	CuZn39Pb3
Pakning	NBR
Coupling	CuZn39Pb3

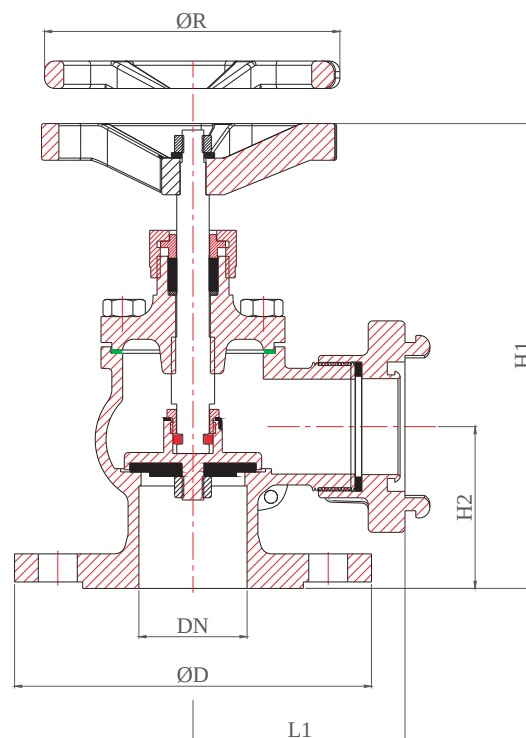

DN	ART. NR.	FLENS	ØD mm	H1 (OPEN) mm	H2 mm	L1 mm	ØR mm	VEKT kg	MAX ARB. TRYKK TEMP UP TO 80°C
40		PN 16	150	230	75	97	140	7,0	16 BAR
50	120270	PN 16	165	232	75	98	140	8,0	16 BAR
65	120271	PN 16	185	270	90	118	160	10,0	16 BAR

EN 10204 – 3.1 Sertifikat tilgjengelig