

CIM 80 – 16



Metalltettende rettløps ventil med klaff.
Sikret deksel.

Max. temperatur:

150°C



PART	MATERIALE
Hus	Messing UNI 5033
Kjegle	Messing EN12165 CW 617N
Toppdeksel pakning	NA 1030 GR
Sete	EPM
Spindel	Messing EN12165 CW 614N
Skruer	Messing EN12165 CW 614N
Bolt	Messing EN12165 CW 614N

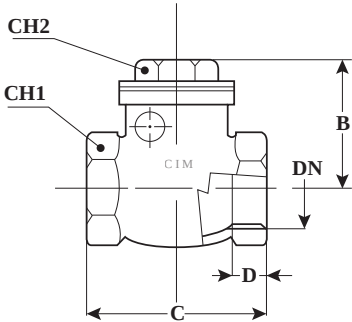

DIM	GRMS.	B	C	D	CH1	CH2
1/2"	230	42	52	11	28	21
3/4"	335	45	62	13	34	26
1"	480	52	70	14	41	32
1 1/4"	720	60	84	16	50	37
1 1/2"	880	62	88	16	57	42
2"	1455	72	106	18	70	52
2 1/2"	2080	86	120	21	85	65
3"	3010	94	138	21	100	75
4"	5550	115	170	23	126	89