

DREIESPJELDVENTIL MED FLENSER


JMC DN 500 - 2400

Typisk bruksområde: Vannforsyning
Rørbruddsventil

Temperatur område: -15 / + 80 gr. C



PART	MATERIALE
Hus	Seigjern GGG 40.3 / EN-GJS-400-18
Spjeld	Alu/Brz C958 / SS316 / DI+Coating
Spindel	AISI 316
Pakning	EPDM
Foringer	PTFE

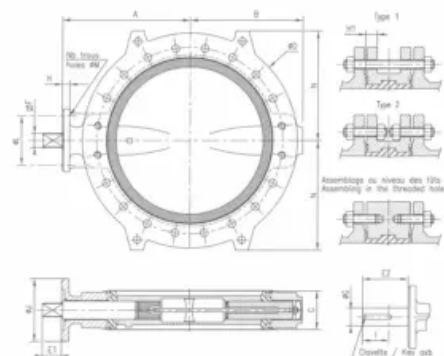

DN	A mm	B mm	C mm	ØD mm	E 1/2 mm	ØF / ØG mm	ØJ mm	ØL mm	P mm	A x B x L mm	MAX W.P.	VEKT kg
500	425	375	127	730	63 / 100	46 / 60	210	165	375	18 x 11 x 80	PN 25	167
600	495	430	154	845	63 / 100	46 / 60	210	165	432	18 x 11 x 80	PN 25	203
700	570	510	165	940	81 / 100	55 / 80	300	254	480	22 x 14 x 100	PN 25	292
750	610	540	165	984	81 / 100	55 / 80	300	254	505	22 x 14 x 100	PN 25	400
800	640	560	190	1060	81 / 100	55 / 80	300	254	542	22 x 14 x 100	PN 25	403
900	700	665	203	1160	110	100	300	254	597	28 x 16 x 100	PN 25	493
1000	750	715	216	1290	110	100	350	298	660	28 x 16 x 100	PN 25	583
1100	820	805	254	1400	140	100	350	298	710	28 x 16 x 120	PN 16	1199
1200	870	830	254	1490	140	100	350	298	760	28 x 16 x 120	PN 16	1276
1300	960	935	254	1625	140	120	415	356	835	32 x 18 x 130	PN 16	1672
1400	1015	1000	254	1690	140	120	415	356	865	32 x 18 x 130	PN 16	1749
1500	1130	1090	254	1855	180	130	475	406	950	32 x 18 x 160	PN 16	2134
1600	1170	1135	254	1930	180	130	475	406	980	32 x 18 x 160	PN 16	2211
2400	1672	1590	356	2755	200	150	560	483	1425	45 x 25 x 170	PN 6	5940

EN 10204 – 3.1 Sertifikat tilgjengelig. * Monterert mellom flenser