


GALVANISERT LØSFLENS, PN 10

Materiale S235JR RST 37.2/Galvanisert

DIN 2642 (EN 1092-1) PN 10

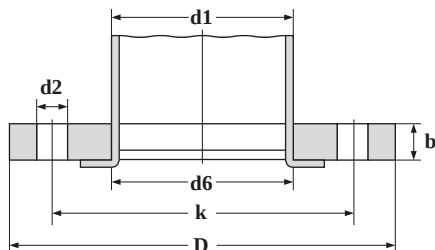

DN	D1 RØR	D6 mm	D mm	B mm	K mm	ANT. BOLTER	BOLT	D2	VEKT kg	ART. NR
15	21,3	24	95	14	65	4	M12	14	0,7	1251424
20	25,0	28	105	14	75	4	M12	14	0,81	1251429
20	26,9	30	105	14	75	4	M12	14	0,81	1251434
25	30,0	33	115	16	85	4	M12	14	1,11	1251439
25	33,7	36	115	16	85	4	M12	14	1,11	1251444
32	38,0	42	140	16	100	4	M16	18	1,64	1251449
32	42,4	46	140	16	100	4	M16	18	1,64	1251454
40	44,5	50	150	16	110	4	M16	18	1,86	1251459
40	48,3	54	150	16	110	4	M16	18	1,86	1251464
50	54,0	60	165	16	125	4	M16	18	2,20	1251468
50	57,0	62	165	16	125	4	M16	18	2,20	1251469
50	60,3	65	165	16	125	4	M16	18	2,20	1251474
65	69,0	81	185	16	145	4	M16	18	2,60	1251482
65	76,1	81	185	16	145	4	M16	18	2,60	1251484
80	84,0	90	200	18	160	8	M16	18	3,30	1251487
80	88,9	94	200	18	160	8	M16	18	3,30	1251489
100	104,0	113	220	18	180	8	M16	18	3,70	1251491
100	108,0	113	220	18	180	8	M16	18	3,70	1251492
100	114,3	119	220	18	180	8	M16	18	3,70	1251494
125	129,0	136	250	18	210	8	M16	18	4,55	1251497
125	133,0	138	250	18	210	8	M16	18	4,55	1251499
125	139,7	145	250	18	210	8	M16	18	4,55	1251505
150	154,0	164	285	18	240	8	M20	22	5,60	1251507
150	159,0	164	285	18	240	8	M20	22	5,60	1251509
150	168,3	173	285	18	240	8	M20	22	5,60	1251514
200	204,0	216	340	20	295	8	M20	22	7,50	1251527
200	219,1	225	340	20	295	8	M20	22	7,50	1251529
250	254,0	268	395	22	350	12	M20	22	10,3	1251532
250	267,0	273	395	22	350	12	M20	22	10,3	1251534
250	273,0	279	395	22	350	12	M20	22	10,3	1251539
300	306,0	318	445	26	400	12	M20	22	13,9	1251542
300	323,9	329	445	26	400	12	M20	22	13,9	1251544
350	355,6	362	505	28	460	16	M20	22	18,5	1251549
400	406,4	413	565	32	515	16	M24	26	34,0	1251554
500	508,0	517	670	38	620	20	M24	26	37,0	1251559
600	610,0	618	780	44	725	20	M27	30	55,7	1251564

Forbehold om trykkfeil og endring av produktet