


KONSENTRISKE OVERGANG I KOBBER NIKKEL

Materiale CuNi 90/10

DIN 86089

Sertifikat EN 10204-3.1 tilgjengelig

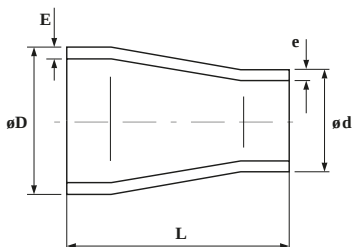

ØD mm	E mm	ød mm	e mm	L mm	VEKT kg	ART. NR
30,0	1,5	25,0	1,5	35	0,05	5018005
38,0	1,5	25,0	1,5	50	0,07	5018009
38,0	1,5	30,0	1,5	50	0,08	
44,5	1,5	30,0	1,5	80	0,12	5018023
44,5	1,5	38,0	1,5	80	0,13	5018032
44,5	2,0	38,0	2,0	80	0,25	5018036
57,0	1,5	30,0	1,5	80	0,21	5018041
57,0	1,5	38,0	1,5	80	0,23	5018045
57,0	1,5	44,5	1,5	80	0,25	5018049
57,0	2,0	38,0	2,0	80	0,30	5018047
57,0	2,0	44,5	2,0	80	0,37	5018054
76,1	2,0	44,5	1,5	90	0,26	
76,1	2,0	44,5	2,0	90	0,37	5018063
76,1	2,5	44,5	2,0	90	0,41	5018065
76,1	2,5	57,0	1,5	90	0,44	5018067
76,1	2,0	57,0	2,0	90	0,38	5018072
76,1	2,5	57,0	2,0	90	0,43	5018074
89,0	2,0	57,0	1,5	90	0,40	5018081
89,0	2,0	57,0	2,0	90	0,40	5018082
89,0	2,5	57,0	2,0	90	0,57	5018087
89,0	2,0	76,0	1,5	90		5018089
89,0	2,5	76,1	2,5	90	0,50	5018094
108,0	2,5	57,0	1,5	100	0,48	5018098
108,0	2,5	57,0	2,0	100	0,72	5018103
108,0	2,5	76,1	2,0	100	0,73	5018105
108,0	2,5	76,1	2,5	100	0,81	5018112
108,0	2,5	88,9	2,0	100	0,61	5018116
133,0	2,5	76,0	2,0	140	1,20	5018125
133,0	2,5	76,0	2,5	140	1,30	5018124
133,0	2,5	88,9	2,0	140	1,35	5018127
133,0	3,0	76,1	2,5	140	1,50	5018126
133,0	3,0	88,9	2,5	140	1,70	5018129
133,0	3,0	108,0	2,5	140	1,80	5018134
159,0	2,5	89,0	2,5	150	1,80	5018143
159,0	2,5	108,0	2,5	150	1,60	5018146
159,0	3,0	133,0	2,5	150	2,10	5018152

ØD mm	E mm	ød mm	e mm	L mm	VEKT kg	ART. NR
159,0	3,0	88,9	2,5	150	1,60	5018145
159,0	3,0	133,0	3,0	150	2,10	5018154
219,1	3,0	108,0	2,5	155	3,00	5018155
219,1	3,0	133,0	2,5	155	2,86	5018167
219,1	3,0	159,0	2,5	155	2,80	5018174
267,0	3,0	159,0	2,5	210	3,49	5018184
267,0	3,0	219,0	3,0	210	4,80	5018201
267,0	4,0	219,1	3,5	210	5,70	5018203
267,0	4,0	219,1	4,0	210	5,95	5018204
267,0	4,5	108,0	3,0	210	6,30	5018187
267,0	3,0	159,0	2,5	210	4,53	5019001
267,0	4,0	159,0	3,0	210	7,10	5018192
323,9	4,0	219,1	3,0	210	6,30	5018211
323,9	4,0	267,0	3,0	210	6,88	5018215
368,0	4,0	219,1	3,0	300	9,76	5018221
368,0	4,0	267,0	3,0	300	10,6	
368,0	4,0	323,9	4,0	300	11,5	
419,1	4,0	219,1	3,0	325	11,5	
419,1	4,0	267,0	3,0	300	12,4	
419,1	4,0	323,9	4,0	300	13,4	
419,1	4,0	368,0	4,0	300	14,2	
457,2	4,0	219,1	3,0	350	13,1	
457,2	4,0	267,0	3,0	350	14,1	
457,2	4,0	323,9	4,0	350	15,2	
457,2	4,0	368,0	4,0	350	16,1	
457,2	4,0	419,1	4,0	350	17,1	
508,0	4,5	267,0	3,0	375	18,1	
508,0	4,5	323,9	4,0	375	19,4	
508,0	4,5	368,0	4,0	375	20,5	
508,0	4,5	419,1	4,0	375	21,7	
508,0	4,5	457,2	4,0	375	22,6	
508,0	5,0	368,0	4,0	400	27,2	
610,0	5,0	419,1	4,0	400	28,6	
610,0	5,0	457,2	4,0	400	29,7	
610,0	5,0	508,0	4,5	400	31,1	