
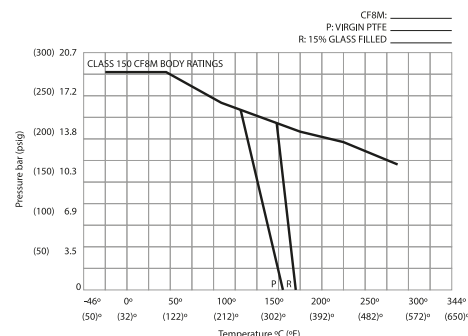
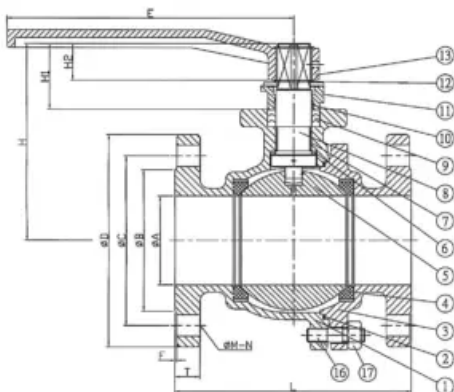


KULEVENTIL – PN 16/40

Fullt gjennomløp. ISO 5211 top flens Flenseboring: PN 16

Alternativer:

Material Støpestål A216 og Seigjern

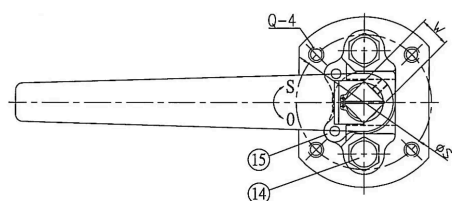

NR/NO	PART	MATERIALE
1	Hus	Stainless Steel SS 1.4408
2	Hus tetning	PTFE
3	Endestykke	Stainless Steel SS 1.4408
4	Sete	RTFE
5	Kule	AISI 316
6	Skive	PTFE
7	Foring	PTFE
8	Spindel	AISI 316
9	Spindeltetning	PTFE
10	Pakboks foring	PTFE
11	Pakboks	AISI 304
12	Låsering	AISI 304
13	Spak	Stål
14	Bolt	AISI 304
15	Stop plate	AISI 304
16	Bolt	SS A193 Gr. B8
17	Mutter	SS A194 Gr. 8

DN	ART. NR. MANUAL	ØA mm	L mm	ØD mm	H mm	H1 mm	W mm	E mm	ØS mm	TRYKK KLASSE
15	080133	15	115,0	95,0	65,7	22,7	11,0	131,0	42,0	PN 16
20	080134	20	120,0	105,0	68,2	22,5	11,0	131,0	42,0	PN 16
25	080135	25	125,0	115,0	80,6	29,3	14,0	165,0	50,0	PN 16
32	080136	32	130,0	140,0	86,5	29,3	14,0	165,0	50,0	PN 16
40	080137	40	140,0	150,0	108,9	38,4	17,0	200,0	70,0	PN 16
50	080138	50	150,0	165,0	116,5	38,4	17,0	200,0	70,0	PN 16
65	080139	65	170,0	185,0	139,0	38,4	17,0	200,0	70,0	PN 16
80	080140	80	180,0	200,0	169,4	58,3	22,0	330,0	102,0	PN 16
100	080141	100	190,0	220,0	193,3	60,3	22,0	330,0	102,0	PN 16
125	080142	125	325,0	250,0	237,0	75,0	27,0	753,0	125,0	PN 16
150	080143	150	350,0	285,0	256,0	75,00	27,00	753,00	125,0	PN 16

Forbehold om trykkfeil og endring av produktet