

MEMBRANVENTIL

PN10/16

Vacum – systemer, trykkluft og vann.

Velegnet for reguleringsformål.

Maks temp:

80° C

Max Arbeidstrykk:


3/8" – 2" : 16 bar.

Alternativ:

Kan leveres med membraner i alternative materialer.



NR	DETALJ	MATERIALE
1	Hus	Cast Iron GG25
2	Deksel	Cast Iron GG25
3	Spindel	Cast Steel GSC25
4	Kjegle	Cast Iron GG25
5	Membran	NBR
6	Ratt	Cast Iron GG25

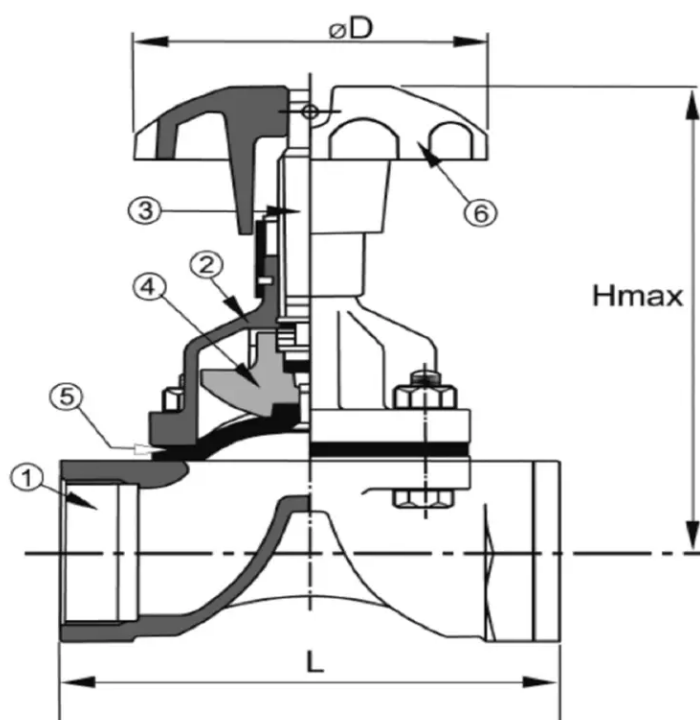

DN	ART. NR.	G	L mm	H MAX mm	D mm	VEKT kg
15		1/2"	64	90	82	1,3
20		3/4"	83	94	82	1,5
25		1"	111	119	120	2,2
32		1 1/4"	124	155	120	3,1
40		1 1/2"	143	164	120	3,9
50		2"	168	188	120	4,6