


## PLAN SVEISEFLENS, PN 16 & 40

Materiale S235JR RST 37.2

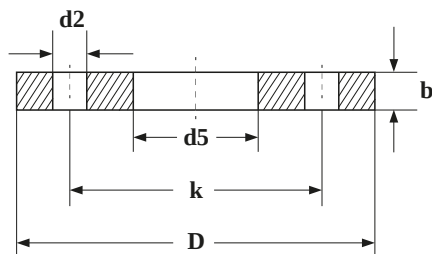

### PN 16 – NS 2527

| DN  | RØR DIA | D5 mm | D mm | B mm | K mm | ANT. BOLTER | BOLT | D2 mm | VEKT kg | ART. NR. |
|-----|---------|-------|------|------|------|-------------|------|-------|---------|----------|
| 15  | 21,3    | 22,0  | 95   | 12   | 65   | 4           | M12  | 14    | 0,57    | 1254629  |
| 20  | 26,0    | 27,5  | 105  | 14   | 75   | 4           | M12  | 14    | 0,82    | 1254639  |
| 25  | 33,7    | 34,5  | 115  | 14   | 85   | 4           | M12  | 14    | 1,00    | 1254649  |
| 32  | 42,4    | 43,0  | 140  | 16   | 100  | 4           | M16  | 18    | 1,62    | 1254659  |
| 40  | 48,3    | 49,0  | 150  | 16   | 110  | 4           | M16  | 18    | 1,85    | 1254669  |
| 50  | 60,3    | 61,0  | 165  | 18   | 125  | 4           | M16  | 18    | 2,46    | 1254679  |
| 65  | 76,1    | 77,0  | 185  | 18   | 145  | 4           | M16  | 18    | 2,99    | 1254684  |
| 80  | 88,9    | 90,0  | 200  | 20   | 160  | 8           | M16  | 18    | 3,61    | 1254689  |
| 100 | 114,3   | 115,5 | 220  | 22   | 180  | 8           | M16  | 18    | 4,39    | 1254699  |
| 125 | 139,7   | 141,5 | 250  | 24   | 210  | 8           | M16  | 18    | 5,88    | 1254709  |
| 150 | 168,3   | 170,5 | 285  | 24   | 240  | 8           | M20  | 22    | 7,12    | 1254719  |
| 200 | 219,1   | 221,5 | 340  | 26   | 295  | 12          | M20  | 22    | 9,70    | 1254729  |
| 250 | 273,0   | 276,0 | 405  | 32   | 355  | 12          | M24  | 26    | 15,70   | 1254734  |
| 300 | 323,9   | 327,0 | 460  | 32   | 410  | 12          | M24  | 26    | 19,10   | 1254744  |
| 350 | 355,6   | 359,0 | 520  | 36   | 470  | 16          | M24  | 26    | 29,00   | 1254749  |
| 400 | 406,4   | 410,0 | 580  | 38   | 525  | 16          | M27  | 30    | 36,00   | 1265759  |
| 450 | 457,0   | 461,0 | 640  | 38   | 585  | 20          | M27  | 30    | 41,90   | 1254769  |
| 500 | 508,0   | 512,0 | 715  | 40   | 650  | 20          | M30  | 33    | 56,00   | 1254774  |
| 600 | 610,0   | 614,0 | 840  | 44   | 770  | 20          | M33  | 36    | 82,10   |          |
| 700 | 711,0   | 716,0 | 910  | 48   | 840  | 24          | M33  | 36    | 94,20   |          |
| 800 | 813,0   | 818,0 | 1025 | 52   | 950  | 24          | M36  | 39    | 114,0   |          |

### PN 40 – NS 2529

| DN  | RØR DIA | D5 mm | D mm | B mm | K mm | ANT. BOLTER | BOLT | D2 mm | VEKT kg | ART. NR. |
|-----|---------|-------|------|------|------|-------------|------|-------|---------|----------|
| 40  | 48,3    | 49,0  | 150  | 18   | 110  | 4           | M16  | 18    | 2,12    | 1254864  |
| 50  | 60,3    | 61,0  | 165  | 20   | 125  | 4           | M16  | 18    | 2,70    | 1254874  |
| 65  | 76,1    | 77,0  | 185  | 24   | 145  | 8           | M16  | 18    | 3,82    | 1254884  |
| 80  | 88,9    | 90,0  | 200  | 24   | 160  | 8           | M16  | 18    | 4,45    | 1254889  |
| 100 | 114,3   | 115,5 | 235  | 26   | 190  | 8           | M20  | 22    | 5,65    | 1254899  |
| 125 | 139,7   | 141,5 | 270  | 26   | 220  | 8           | M24  | 26    | 8,60    | 1254905  |
| 150 | 168,3   | 170,5 | 300  | 28   | 250  | 8           | M24  | 26    | 9,90    | 1254914  |
| 200 | 219,1   | 221,5 | 375  | 32   | 320  | 12          | M27  | 30    | 16,70   | 1254924  |
| 250 | 273,0   | 276,0 | 450  | 36   | 385  | 12          | M30  | 33    | 26,70   | 1254929  |