

RVA 04LT – PN 16 (10)

LUG DREIESPJELDVENTILER


Typisk bruksområde: VVS

Temperaturområde: -15 / + 120 gr. C

Design: Lang hals

Flenseboring: PN 16(10)

Manuell betjening: DN 50 – 150 spak, DN 200 – 300 gir

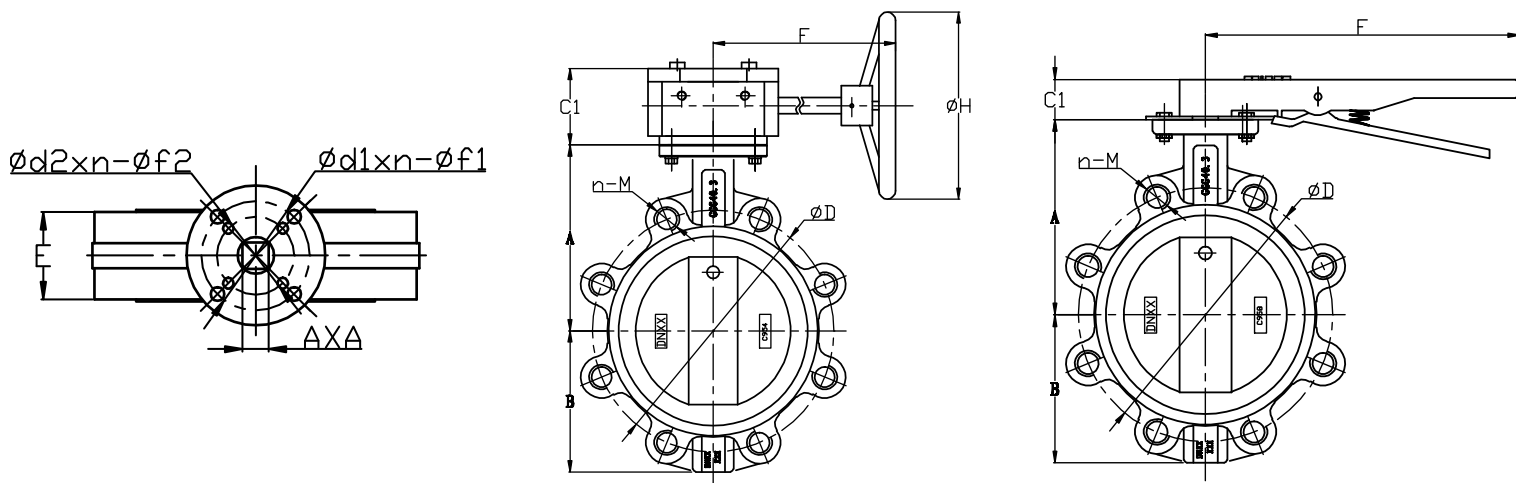

PART	MATERIALE
Hus	Seigjern – GGG 40.3/EN-GJS-400-18
Spjeld	AISI 316
Spindel	AISI 316
Låsepin	Monel
Pakning	EPDM
Foringer	PTFE

DN	ART. NR. MANUAL	ART. NR. FREE TOP	AXA mm	ISO TOP	E mm	A mm	B mm	C mm	C1 mm	F mm	H mm	VEKT kg*	TRYKK KLASSE
40	5560021		11	F07	33	120	75	30	32	267		2,6	PN 16
50	5560022		11	F07	43	161	80	30	32	267		4,2	PN 16
65	5560023		11	F07	46	175	89	30	32	267		5,0	PN 16
80	5560024		11	F07	46	181	95	30	32	267		6,5	PN 16
100	5560025		14	F07	52	200	114	30	32	267		8,0	PN 16
125	5560026		14	F07	56	213	127	30	32	267		10,2	PN 16
150	5560027		17	F07	56	226	140	30	32	267		12,0	PN 16
200	5560028		17	F07/10	60	260	175	35	77	236	290	17,0	PN 10
250	5560029		22	F10	68	292	220	38	77	227	290	28,2	PN 10
300	5560031		27	F12	78	337	255	38	77	227	290	44,0	PN 10

EN 10204 – 3.1 Sertifikat tilgjengelig * Free top