

## RVA 04W – PN 16 (10)

### WAFER DREIESPJELDVENTILER




Typisk bruksområde: VVS

Temperaturområde: -15/ +120 gr. C

Design: Lang hals

Multi flenseboring: PN 16(10) / ANCI

Manuell betjening: DN 50 – 150 spak, DN 200 – 300 gir

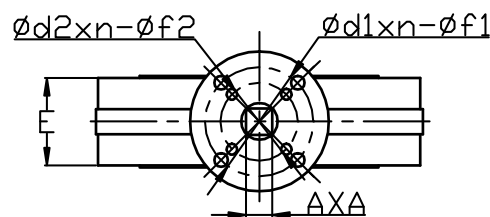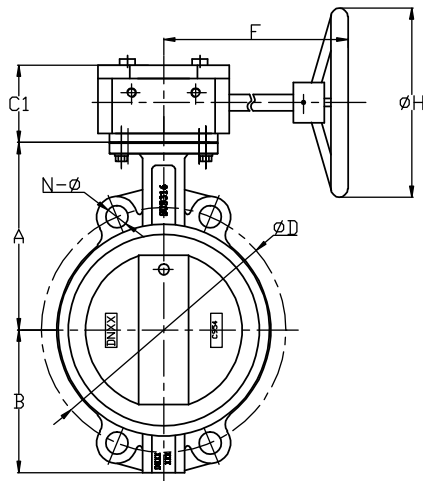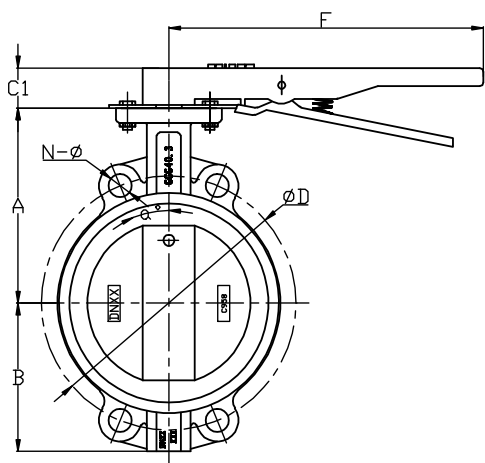

| PART     | MATERIALE                       |
|----------|---------------------------------|
| Hus      | Seigjern GGG 40.3/EN-GJS-400-18 |
| Spjeld   | AISI 316                        |
| Spindel  | AISI 316                        |
| Låsepin  | Monel                           |
| Pakning  | EPDM                            |
| Foringer | PTFE                            |

| DN  | ART. NR. MANUAL | ART. NR. | AXA mm | ISO TOP | E mm | A mm | B mm | C mm | C1 mm | F mm | H mm | VEKT kg* | TRYKK KLASSE |
|-----|-----------------|----------|--------|---------|------|------|------|------|-------|------|------|----------|--------------|
| 40  | 5560001         |          | 11     | F07     | 33   | 120  | 75   | 30   | 32    | 267  |      | 2,4      | PN 16        |
| 50  | 5560002         |          | 11     | F07     | 43   | 161  | 80   | 30   | 32    | 267  |      | 2,8      | PN 16        |
| 65  | 5560003         |          | 11     | F07     | 46   | 175  | 89   | 30   | 32    | 267  |      | 3,2      | PN 16        |
| 80  | 5560004         |          | 11     | F07     | 46   | 181  | 95   | 30   | 32    | 267  |      | 4,3      | PN 16        |
| 100 | 5560005         |          | 14     | F07     | 52   | 200  | 114  | 30   | 32    | 267  |      | 5,4      | PN 16        |
| 125 | 5560006         |          | 14     | F07     | 56   | 213  | 127  | 30   | 32    | 267  |      | 7,5      | PN 16        |
| 150 | 5560007         |          | 17     | F07     | 56   | 226  | 140  | 30   | 32    | 267  |      | 9,3      | PN 16        |
| 200 | 5560008         |          | 17     | F10     | 60   | 260  | 175  | 35   | 77    | 236  | 290  | 12,8     | PN 10        |
| 250 | 5560009         |          | 22     | F10     | 68   | 292  | 220  | 38   | 77    | 227  | 290  | 24,5     | PN 10        |
| 300 | 5560011         |          | 27     | F12     | 78   | 337  | 255  | 38   | 77    | 227  | 290  | 31,0     | PN 10        |

EN 10204 – 3.1 Sertifikat tilgjengelig \* Free top