

RVA 11LT – PN 16 (10)


LUG DREIESPJELDVENTIL

Typisk bruksområde: RSW & VVS

Temperaturområde: -15 / + 120 gr. C

Flenseboring: PN 16(10)

Manuell betjening: DN 50 – 150 spak, DN 200 – 600 gir

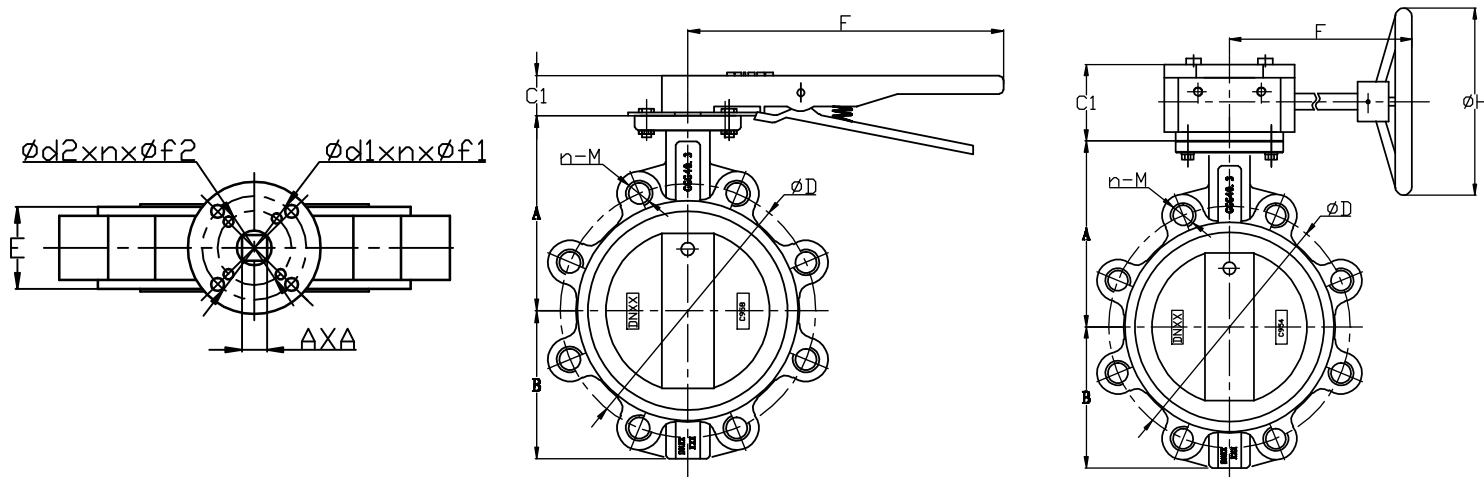

PART	MATERIALE
Hus	Seigjern GGG 40.3/EN-GJS-400-18
Spjeld	Alu/Brz C958
Spindel	AISI 316
Låsepin	Monel
Pakning	EPDM
Foringer	PTFE

DN	ART. NR. MANUAL	ART. NR. FREE TOP	AXA mm	ISO TOP	E mm	A mm	B mm	C mm	C1 mm	F mm	H mm	VEKT kg*	TRYKK KLASSE
40	5560441	5560061	11	F07	33	120	75	30	32	267		2,6	PN 16
50	5560442	5560062	11	F07	43	124	80	30	32	267		4,2	PN 16
65	5560443	5560063	11	F07	46	134	89	30	32	267		5,0	PN 16
80	5560444	5560064	11	F07	46	141	95	30	32	267		6,5	PN 16
100	5560445	5560065	14	F07	52	156	114	30	32	267		8,0	PN 16
125	5560446	5560066	14	F07	56	168	127	30	32	267		10,2	PN 16
150	5560447	5560067	17	F07	56	184	140	30	32	267		12,0	PN 16
200	5560448	5560068	17	F07/10	60	213	175	35	77	236	290	17,0	PN 10
250	5560449	5560069	22	F10	68	244	220	38	77	227	290	28,2	PN 10
300	5560451	5560071	27	F12	78	283	255	38	77	227	290	44,0	PN 10
350	5560452	5560072	27	F12	78	368	268	38	77	227	290	68,0	PN 10
400	5560453	5560073	36	F12	102	400	318	38	103	300	290	89,0	PN 10
450	5560454	5560074	36	F14	114	422	365	38	103	300	290	105,0	PN 10
500	5560455	5560075	36	F14	127	479	358	38	147	350	290	180,0	PN 10
600	5560456	5560076	46	F16	154	562	445	38	147	350	290	277,0	PN 10

EN 10204 – 3.1 Sertifikat tilgjengelig * Free top